

PRODUCT SHEET

REV 1.0 - IT202509

0970 BABEL




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801



SECURITY AREA

1395

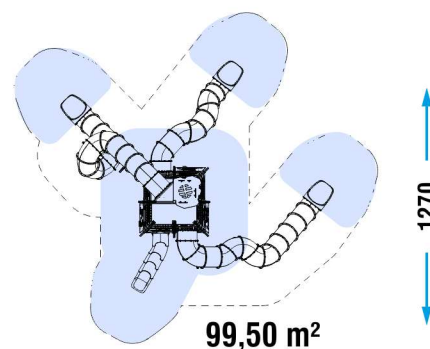

	CATALOG COLLECTION	TITAN COLLECTION
	DIMENSIONS (L x W x H) in cm	1050 x 895 x 620 cm
	IMPACT AREA	67,00 m ²
	MAXIMUM CFH	150 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	70

PRODUCT SHEET

REV 1.0 - IT202509

0970 BABEL



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902


ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No: GOTT2532E1801

- COMPOSITION**
- n°8 70x130 profile structural aluminium poles
 - n°1 aluminium pole 90x90mm
 - n°8 antislip aluminium decks with powder coated steel frame
 - n°1 powder coated steel ladder
 - n°5 HDPE sheet climbings
 - n°16 HDPE sheet barriers
 - n°19 powder coated steel barriers
 - n°3 rotating mold PTE tube slides
 - n°1 rotating mold PTE modular slide
 - n°2 19 mm thick HDPE roofs
 - n°8 HDPE sheet decorations

PLAY PANELS




LUDIC PLAY PANEL
x1



LUDIC PLAY PANEL
x1

INSTALLATION

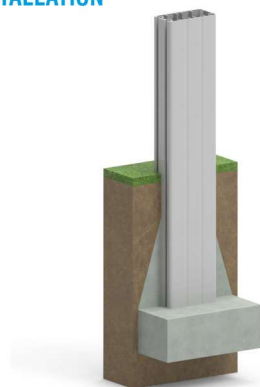

Where there is an aluminum pole, the plinth must be created directly on it.

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000