

PRODUCT SHEET
REV 2.1 - EN202003
205 MAXA



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT253201932

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT253201901




SWINGING



CATALOG COLLECTION	PLAYGROUND ESSENTIALS
DIMENSIONS (L x W x H) in cm	320 x 175 x 240
MAXIMUM CFH	135
IMPACT ATTENUATING SURFACE	min. 21,00 m ² - MAX 42,00 m ²
SUGGESTED AGE OF USE	3+
COMPOSITION	Double swing built up with nordic pine glulam 90x90mm poles with cloverleaf section and Ø89mm 2,5mm thick powder coated metal tubular beam, equipped with n°2 shock absorber rubber seats with inner metal structure held by security galvanized chains. Lubrication free suspension and articulation joint system. Upper decorations with engraved 19mm HDPE sheet. Available with plane or cradle seats.

SECURITY AREA

620

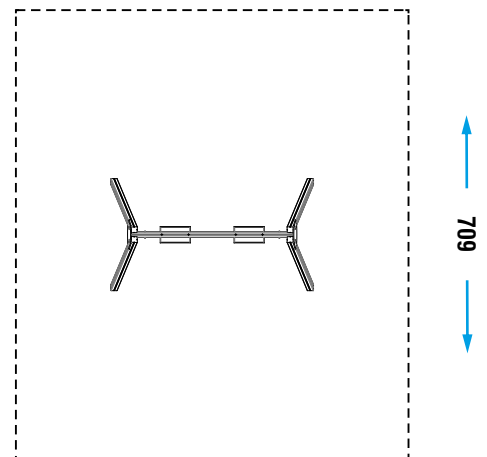

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.