




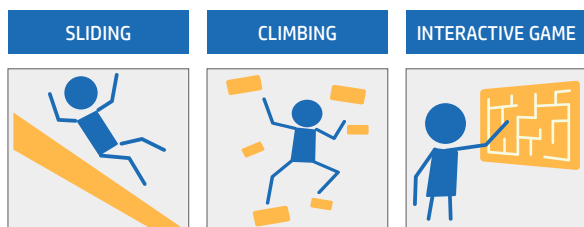


PRODUCT SHEET


4007 OTIS

REV 0.0 - IT202509



	CATALOG COLLECTION	TIKA LINE
	DIMENSIONS (L X W X H)	505 x 385 x 350 cm
	IMPACT AREA	42,00 m ²
	MAXIMUM CFH	150 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	15

SECURITY AREA

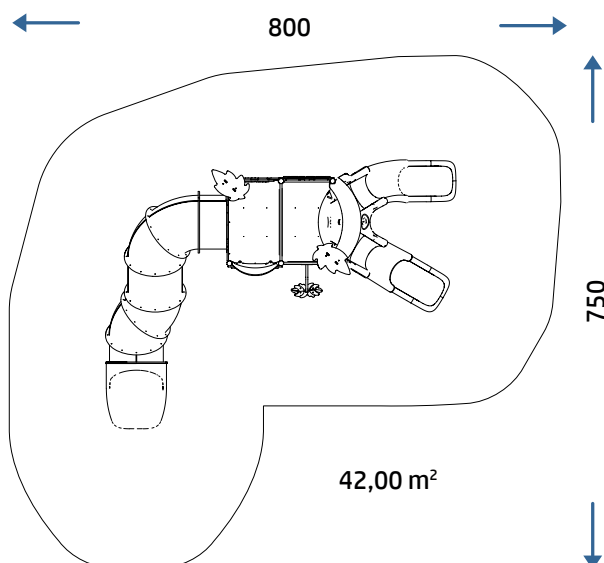

PRODUCT SHEET

4007 OTIS

REV 0.0 - IT202509

COMPOSITION


- n° 6 70x70 octagonal section structural aluminium posts
- n° 1 rotating mold PTE modular tube slide (H150)
- n° 1 rotating mold PTE double slide (H90)
- n° 2 anti-slip recycled HDPE rectangular decks
- n° 1 metal and HDPE sheet guardpanel
- n° 1 HDPE sheet guardpanel
- n° 1 rotating mold PTE guardpanel

- n° 1 perch
- n° 1 metal opened guardpanel
- n° 1 HDPE sheet climbing
- HDPE sheet decorations

PLAY PANELS




LUDIC PLAY PANEL X1




LUDIC PLAY PANEL X1

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIAL (mm)	DESCRIPTION (mm)	MINIMUM DEPTH (mm) (b)	CRITICAL FALL HEIGHT (mm)
LAWN/SOIL			1000 (d)
BARK	20 TO 80 GRAIN SIZE	200 300	2000 3000
WOOD CHIPS	20 TO 80 GRAIN SIZE	200 300	2000 3000
SAND	20 TO 80 GRAIN SIZE	200 300	2000 3000
GRAVEL	20 TO 80 GRAIN SIZE	200 300	2000 3000
RUBBER SURFACING RESPONDENT TO HIC	THICKNESS 30 MM		DEPENDENT ON CERTIFICATION TESTS 1000
	THICKNESS 40 MM		1300
	THICKNESS 45 MM		1500
	THICKNESS 60 MM		2000
	THICKNESS 70 MM		2500
	THICKNESS 90 MM		3000