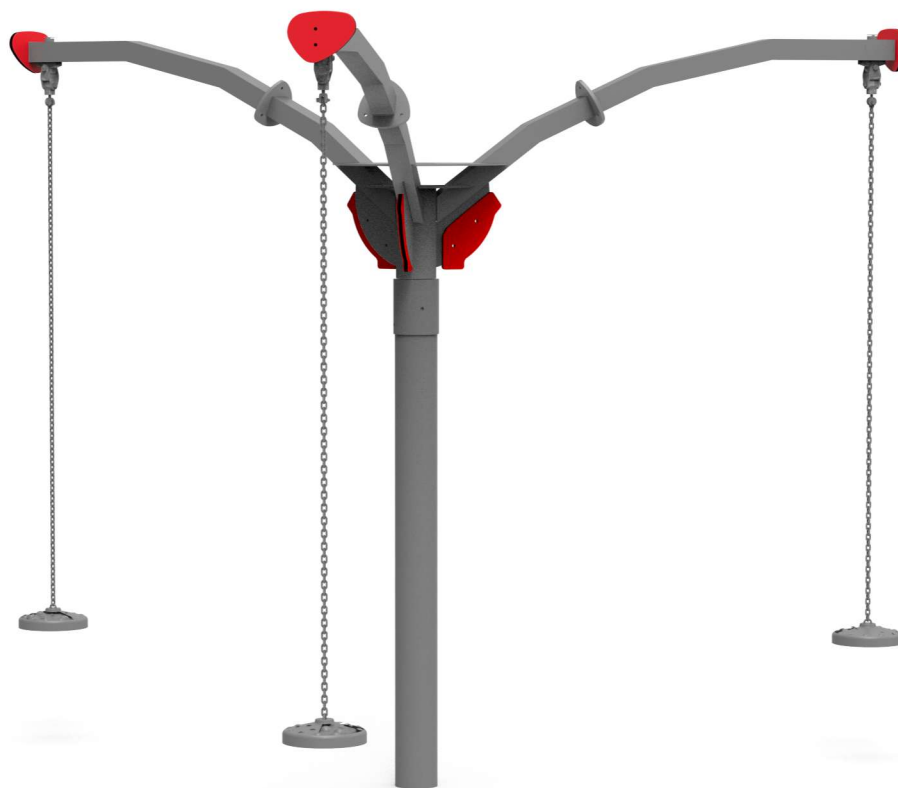


PRODUCT SHEET


REV 2.1 - EN202003

439 WENDY


 ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

 ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801


SWINGING




ROTATING



CATALOG COLLECTION	PLAYGROUND ESSENTIALS
DIMENSIONS (L x W x H) in cm	313 x 274 x 250
MAXIMUM CFH	150
IMPACT ATTENUATING SURFACE	min. 90,25 m ² - MAX 90,25 m ²
SUGGESTED AGE OF USE	3+
COMPOSITION	Support pole in tubular powder coated steel Ø139,7x3,6mm and rotating arms in tubular powder coated steel Ø88,9x2mm. Rubber seats with aluminum core supported by a galvanized chain Ø6mm. Rotating on ball or roller bearings.

SECURITY AREA

955

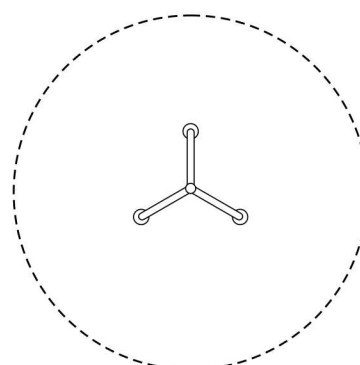

955

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.