

PRODUCT SHEET

REV 0.0 - EN202502

4504 JOYCE




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801



SECURITY AREA

1000

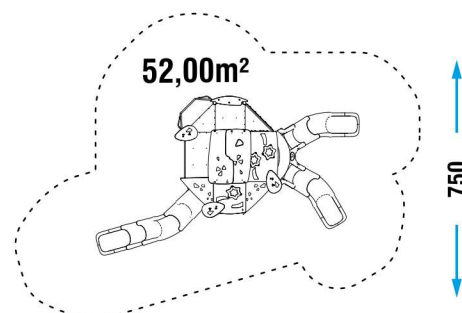

	CATALOG COLLECTION	TIKA LINE
	DIMENSIONS (L x W x H) in cm	650 x 395 x 495 cm
	IMPACT AREA	52,00 m²
	MAXIMUM CFH	275 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	25

PRODUCT SHEET

REV 0.0 - EN202502

4504 JOYCE



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No: GOTT2532E1801

COMPOSITION

- n° 12 70x70 octagonal section structural aluminum posts
- n° 4 rectangular recycled anti-slip HDPE decks
- n° 3 square recycled anti-slip HDPE decks
- n° 5 triangular recycled anti-slip HDPE decks
- n° 6 closed metal guard panels
- n° 4 closed metal and HDPE guard panels
- n° 2 closed HDPE guard panels
- n° 1 roto-molded PTE guard panel
- n° 1 vertical rope climbing
- n° 3 climbing in HDPE sheet
- n° 1 roto-molded PTE modular slide (H190)
- n° 1 double roto-molded PTE modular slide (H130)
- n° 5 HDPE roofs in sheet
- HDPE decorations

PLAY PANELS



LUDIC PLAY PANELS
x5



MUSICAL PLAY PANEL
x1




EDUCATIONAL PLAY PANELS
x2

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.

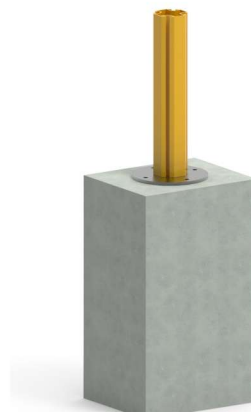

If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000