




CATALOG COLLECTION	TIKA LINE
DIMENSIONS (L x W x H) in cm	695 x 550 x400
MAXIMUM CFH	200
IMPACT ATTENUATING SURFACE	min. 70,50 m ² - MAX 93,50 m ²
SUGGESTED AGE OF USE	3+

COMPOSITION	<ul style="list-style-type: none"> - n° 15 octagonal profile aluminium structural poles - n° 1 rotating mold PTE modular slide - n° 1 rotating mold PTE spiral tube slide (H200) - n° 1 HDPE sheet and metal roof - n° 4 anti-slip HDPE square decks - n° 1 anti-slip HDPE triangular deck - n° 1 anti-slip HDPE rectangular deck - n° 3 HDPE sheet guardpanels - n° 5 open metal guardpanels - n° 3 rotating mold PTE guardpanel - n° 1 HDPE crossbar - n° 1 anti-slip HDPE stairs - n° 2 rotating mold PTE climber modules - n° 3 HDPE sheet play panel (Mike, Yon, Fanny) - n° 4 HDPE sheet climbings - n° 3 pole decorations - HDPE sheet decorations
--------------------	--

SECURITY AREA

1100

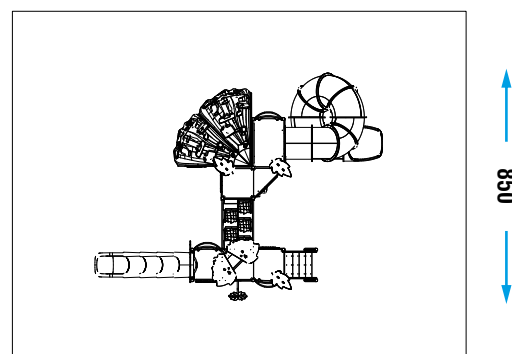

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.