

PRODUCT SHEET  
REV 0.0 - IT202504  
**5601 SHERMAN**




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No.: GOTT2532E1801



|  | CATALOG COLLECTION                  | PARTY LINE           |
|--|-------------------------------------|----------------------|
|  | <b>DIMENSIONS (L x W x H) in cm</b> | 1020 x 620 x 495 cm  |
|  | <b>IMPACT AREA</b>                  | 82,00 m <sup>2</sup> |
|  | <b>MAXIMUM CFH</b>                  | 195 cm               |
|  | <b>SUGGESTED AGE OF USE</b>         | 5+                   |
|  | <b>NUMBER OF USERS</b>              | 30                   |

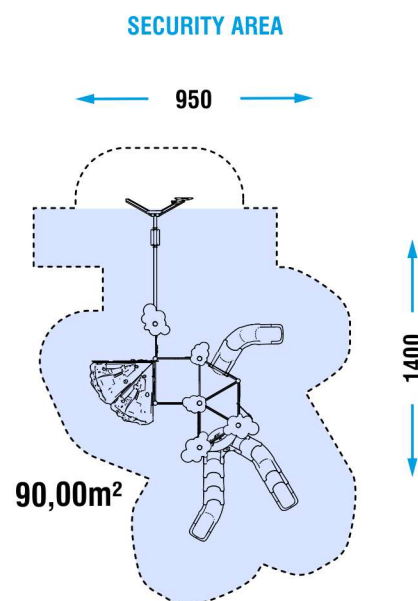

# PRODUCT SHEET

REV 0.0 - IT202504


## 5601 SHERMAN

### COMPOSITION


- n° 10 Ø120 mm hexagonal section aluminium structural posts
- n° 4 powder-coated chequered aluminum decks
- n° 3 closed metal guard panels
- n° 6 open metal guard panels
- n° 2 HDPE sheet guard panels
- n° 2 rotational PTE rock modules with resin grips
- n° 6 HDPE sheet climbings
- n° 1 rope climbing
- n° 1 roto-molded PTE tunnel
- n° 1 table with bench
- n° 1 roto-molded PTE modular slide (H175)
- n° 1 roto-molded PTE double modular slide (H195)
- n° 1 swing
- HDPE sheet decorations

### PLAY PANELS

### INSTALLATION

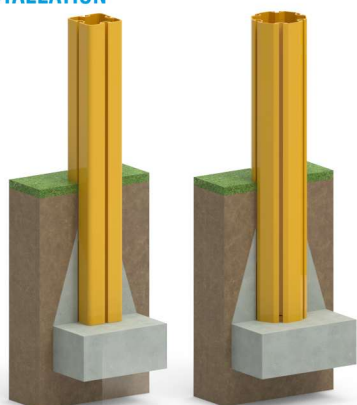

Where there is an aluminum pole, the plinth must be created directly on it.

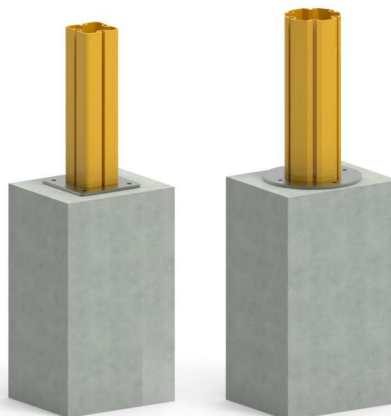

If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |