

PRODUCT SHEET

REV 0.0 - IT202502

6006B MADRID TUBO



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No: GOTT2532E1801



SLIDING




CLIMBING



SECURITY AREA

1050

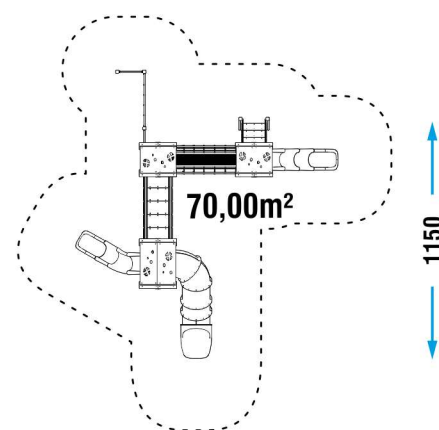

	CATALOG COLLECTION	FUN COLLECTION
	DIMENSIONS (L x W x H) in cm	730 x 810 x 330 cm
	IMPACT AREA	70,00 m²
	MAXIMUM CFH	150 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	20

PRODUCT SHEET

REV 0.0 - IT202502

6006B MADRID TUBO



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902


ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801

COMPOSITION

- n° 12 90x90 mm square section timber or aluminum structural posts
- n° 3 decks with powder-coated metal frame and timber or aluminium slats
- n° 3 HDPE sheet roofs with roto-molded PTE supports
- n° 2 HDPE sheet guard panels
- n° 1 HDPE sheet and metal guard panel
- n° 1 open metal guard panel
- n° 1 «ARCO» bridge
- n° 1 «CORDE» bridge
- n° 1 stairs with recycled anti-slip HDPE steps
- n° 1 HDPE sheet climbing
- n° 1 roto-molded PTE modular slide (H125)
- n° 1 roto-molded PTE modular slide (H140)
- n° 1 roto-molded PTE modular tube slide (H140)
- n° 2 HDPE sheet thrust bearings
- n° 1 rope net climbing
- n° 1 ladder with 4 pegs

PLAY PANELS

INSTALLATION

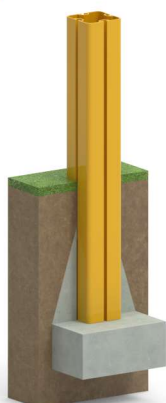

Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000