

# PRODUCT SHEET

REV 0.0 - IT202504

## 661 CLIZIA

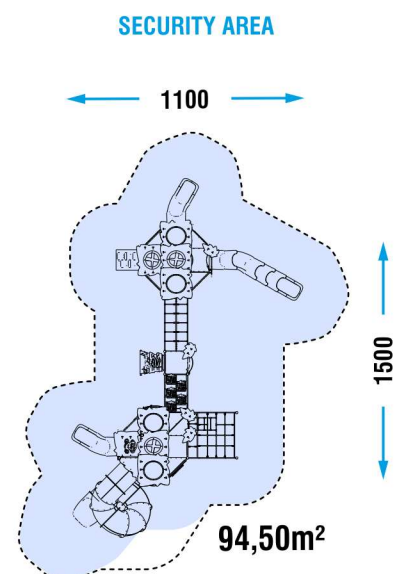


ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No.: GOTT2532E1801



|                                                                                     | CATALOG COLLECTION                  | PARTY LINE           |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------|
|  | <b>DIMENSIONS (L x W x H) in cm</b> | 715 x 1165 x 600 cm  |
|   | <b>IMPACT AREA</b>                  | 92,00 m <sup>2</sup> |
|  | <b>MAXIMUM CFH</b>                  | 210 cm               |
|  | <b>SUGGESTED AGE OF USE</b>         | 5+                   |
|  | <b>NUMBER OF USERS</b>              | 45                   |





**COMPOSITION**

- n° 32 70x70 mm octagonal section aluminum structural posts
- n° 27 recycled anti-slip HDPE decks
- n° 9 HDPE sheet roofs
- n° 10 open metal guard panels
- n° 10 closed metal guard panels
- n° 9 HDPE sheet guard panels
- n° 4 HDPE sheet and metal guard panels
- n° 7 roto-molded PTE guard panels
- n° 1 «CORDE» bridge

- n° 1 «GOBBE» bridge
- n° 16 HDPE sheet climbings
- n° 1 HDPE sheet inclined climbing
- n° 1 roto-molded PTE climbing
- n° 1 shaped net frame
- n° 3 HDPE sheet thrust bearing
- n° 2 roto-molded PTE modular slides (H90)
- n° 1 roto-molded PTE modular slide (H210)
- n° 1 roto-molded PTE tube modular slide (H330)
- HDPE sheet decorations

**PLAY PANELS**

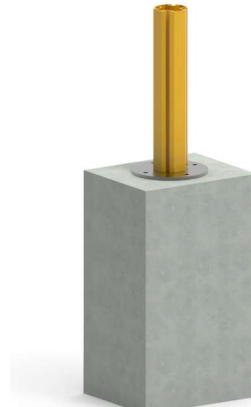
**LUDIC PLAY PANEL**  
**x1**

**LUDIC PLAY PANEL**  
**x1**

**LUDIC PLAY PANEL**  
**x1**

**LUDIC PLAY PANEL**  
**x1**

**LUDIC PLAY PANEL**  
**x1**

**LUDIC PLAY PANEL**  
**x1**
**INSTALLATION**


Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |