

PRODUCT SHEET


REV 0.0 - IT202504

770 THE SAILING MONTY




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801

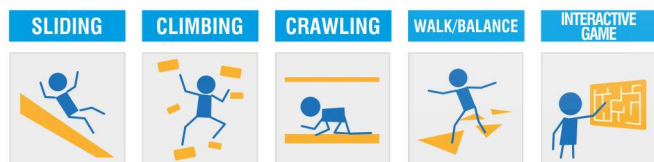

SECURITY AREA

2150

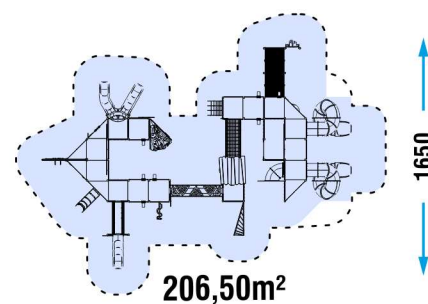

	CATALOG COLLECTION	ESA LINE
	DIMENSIONS (L x W x H) in cm	1800 x 1300 x 515 cm
	IMPACT AREA	202,00 m²
	MAXIMUM CFH	220 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	85

PRODUCT SHEET

REV 0.0 - IT202504

770 THE SAILING MONTY



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No: GOTT2532E1801


COMPOSITION

- n° 56 90x90 mm square section timber or aluminum structural posts
- n° 20 square platforms in chequered aluminum powder coated
- n° 7 square platforms in chequered aluminum powder coated
- n° 6 open metal guard panels
- n° 12 HDPE sheet and metal guard panels
- n° 18 HDPE sheet guard panels
- n° 1 roccia in PTE rotazionale con appigli in resina
- n° 1 «ARCO» climbing (H170)
- n° 1 «ELICA» climbing (H180)
- n° 1 «T-1» climbing (H180)
- n° 1 rope climbing
- n° 1 HDPE sheet climbing
- n° 1 HDPE sheet roof
- n° 1 rope tunnel bridge
- n° 1 «WOBBLE» bridge
- n° 1 «CORDE» bridge
- n° 1 easy access ramp
- n° 2 tunnels with roto-molded PTE moduls
- n° 1 roto-molded PTE modular slide with metal crossbar (H125)
- n° 1 roto-molded PTE double modular slide (H150)
- n° 2 roto-molded PTE spiral modular slides (H220)
- HDPE decorations


PLAY PANELS



LUDIC PLAY PANELS
x3




MUSICAL PLAY PANELS
x3



SENSORY PLAY PANELS
x1

INSTALLATION

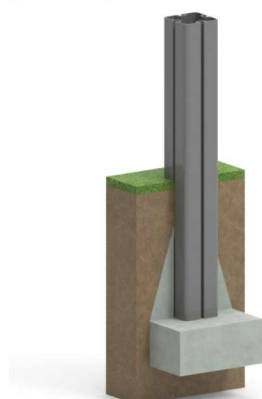

Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000