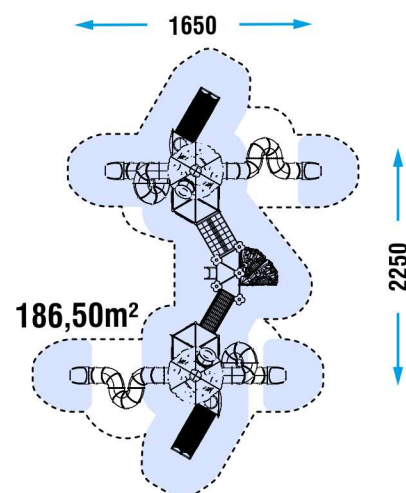




	CATALOG COLLECTION	ESA LINE
	DIMENSIONS (L x W x H) in cm	1870 x 1260 x 830 cm
	IMPACT AREA	156,00 m ²
	MAXIMUM CFH	180 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	85



SECURITY AREA



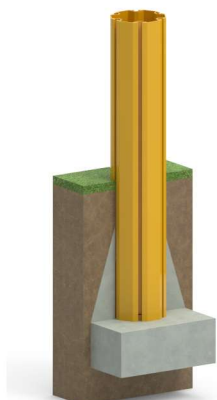
COMPOSITION

- n° 27 Ø120 mm hexagonal section aluminum posts
- n° 47 powder-coated chequered aluminium decks
- n° 2 hexagonal roof with roto-molded PTE tube
- n° 2 HDPE sheet benches
- n° 20 closed metal guard panels
- n° 2 open metal guard panels
- n° 18 closed HDPE sheet guard panels
- n° 14 open HDPE sheet guard panels
- n° 17 HDPE sheet climbings
- n° 1 climbing with metal arches
- n° 2 rotational PTE rock modules and resin grips
- n° 1 tunnel bridge
- n° 1 rope bridge with metal side protections
- n° 2 HDPE sheet thrust bearings
- n° 2 roto-molded PTE spiral tube modular slides (H450)
- n° 2 roto-molded PTE tube modular slides (H270)
- n° 2 roto-molded PTE double modular slides (H180)
- HDPE sheet decorations

PLAY PANELS

LUDIC PLAY PANELS
x2

EDUCATIONAL PLAY PANELS
x2

EDUCATIONAL PLAY PANELS
x2

LUDIC PLAY PANELS
x2

LUDIC PLAY PANELS
x2
INSTALLATION


Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000