

PRODUCT SHEET

REV 3.0 - EN202411

912 ALTALENA 4 POSTI




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT25201902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT25201901




SWINGING



CATALOG COLLECTION	PLAYGROUND ESSENTIALS
DIMENSIONS (L x W x H) in cm	670 x 215 x 240
MAXIMUM CFH	135
IMPACT ATTENUATING SURFACE	min. 45,50 m ² - MAX 66,50 m ²
SUGGESTED AGE OF USE	3+
COMPOSITION	4-places swing built up with 90x90mm aluminium alloy 2,5mm thick profiles with top pyramidal polyurethane caps support poles and beam. Equipped with n°4 shock absorber rubber seats with inner metal structure held by security galvanized chains. Lubrication free suspension and articulation joint system. Upper decorations with engraved 19mm HDPE sheet.

SECURITY AREA

700

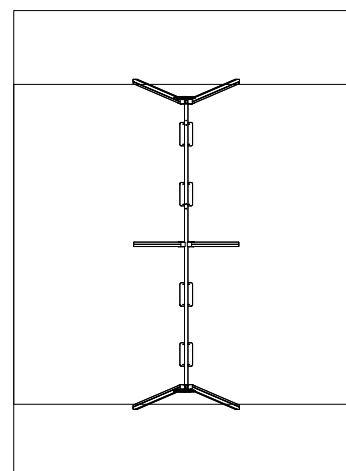

950

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.