

# SCHEDA PRODOTTO

REV 1.0 - IT202510

## 913 ALTALENA

### 2 POSTI + NIDO




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
 EuCI European Certification Institute LTD  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
 EuCI European Certification Institute LTD  
 Certificate No.: GOTT2532E1801



#### DONDOLARSI



#### AREA DI SICUREZZA

← 000 →

|                                                                                     | COLLEZIONE                | PLAYGROUND ESSENTIALS |
|-------------------------------------------------------------------------------------|---------------------------|-----------------------|
|  | DIMENSIONI (L x P x H)    | 670 x 215 x 240 cm    |
|   | AREA D'IMPATTO            | 0,0 m <sup>2</sup>    |
|  | ALTEZZA CRITICA DI CADUTA | 135 cm                |
|  | ETÀ D'USO CONSIGLIATA     | 3+                    |
|  | NUMERO UTILIZZATORI       | 4                     |

↑  
000  
↓

# SCHEDA PRODOTTO

REV 1.0 - IT202510

## 913 ALTALENA

### 2 POSTI + NIDO




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate No.: GOTT2532E1801

#### COMPOSIZIONE

- n° 6 pali sezione 90x90mm
- n° 2 travi di alluminio 70x130mm
- n° 1 cestone a nido Ø120cm in PE con bordo in gomma antiurto
- n° 2 seggiolini in gomma
- n° 8 catene a maglia stretta
- n° 2 decorazioni in lastra di HDPE

#### INSTALLAZIONE

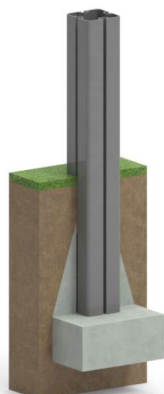

Ove presente il palo in alluminio il plinto va realizzato direttamente su di esso.



Se già presente un fondo adeguato in CLS il gioco può essere fornito con apposite staffe per il tassellaggio a terra (opzione applicabile solo con conferma di fattibilità).

Realizzare un idoneo fondo antitrauma in funzione dell'altezza critica di caduta. Manutenzione periodica obbligatoria come da piano consegnato al cliente.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |