

# SCHEDA PRODOTTO

REV 0.0 - IT202509

## H150 BECKY



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No: GOTT2532E1801




### ROTEARE



### AREA DI SICUREZZA

650

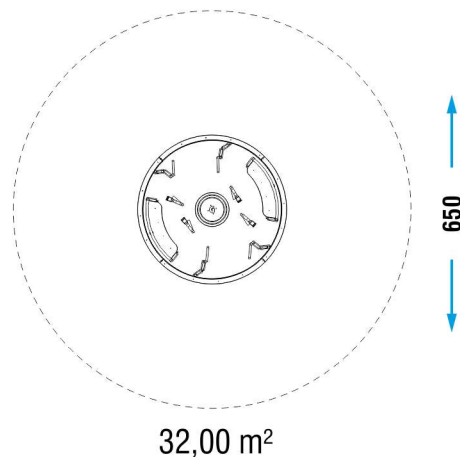

|                                                                                     | COLLEZIONE                | LET'S PLAY TOGETHER |
|-------------------------------------------------------------------------------------|---------------------------|---------------------|
|  | DIMENSIONI (L x P x H)    | 240 x 240 x 85 cm   |
|   | AREA D'IMPATTO            | 32,00 m²            |
|  | ALTEZZA CRITICA DI CADUTA | 41,5 cm             |
|  | ETÀ D'USO CONSIGLIATA     | 3+                  |
|  | NUMERO UTILIZZATORI       | 4                   |

# SCHEDA PRODOTTO

REV 0.0 - IT202509

## H150 BECKY



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate No: GOTT2532E1801

### COMPOSIZIONE

- n°1 base fissa
- n°1 base girevole
- n°1 volante in HDPE
- n°4 cancelletti di protezione in acciaio inox verniciato
- n°1 pedana in alluminio
- n°2 sedute in metallo e HDPE
- cinture di sicurezza

Realizzare un idoneo fondo antitrauma in funzione dell'altezza critica di caduta. Manutenzione periodica obbligatoria come da piano consegnato al cliente.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |