

PRODUCT SHEET

REV 2.0 - IT202509

H170S CANYON SPECIAL



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902


ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801



AREA DI SICUREZZA

1450

	COLLEZIONE	LET'S PLAY TOGETHER
	DIMENSIONI (L x P x H)	1150 x 390 x 315 cm
	AREA D'IMPATTO	73,00 m ²
	ALTEZZA CRITICA DI CADUTA	113
	ETÀ D'USO CONSIGLIATA	3+
	NUMERO UTILIZZATORI	15

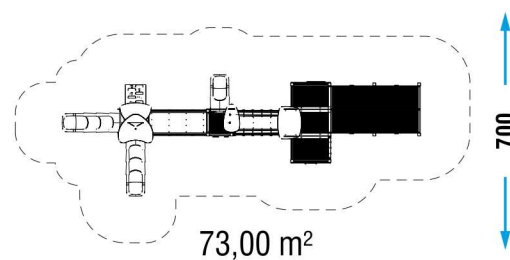

PRODUCT SHEET

REV 2.0 - IT202509

H170S CANYON SPECIAL



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No: GOTT2532E1801

COMPOSITION

- n° 24 aluminum load-bearing poles section 90x90mm
- n° 3 rectangular floors with aluminum slats (H33cm, H33cm, H33cm)
- n° 2 square floors with aluminum slats (H73cm, H113cm)
- n° 3 HDPE sheet roofs
- n° 2 metal parapets
- n° 2 metal handhold
- n° 1 HDPE sheet handhold
- n° 1 aluminum ramp
- n° 3 modular slides (H73cm, H113cm, H113cm)
- n° 1 HDPE sheet climbing (H73cm)
- n° 1 rotational PTE climbing (H113cm)
- n° 1 inclined bridge with rope
- n° 1 inclined ramp bridge with HDPE sides
- HDPE sheet decorations



PLAY PANELS



PANNELLI MUSICALI
x1



PANNELLI LUDICI
x4



INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000