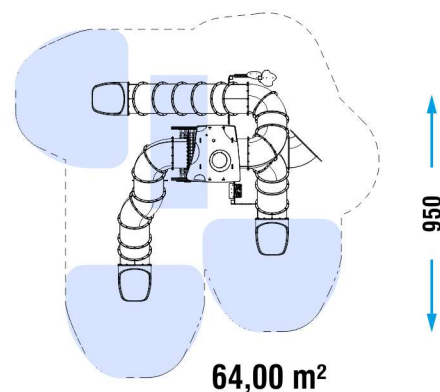




SECURITY AREA

950





	CATALOG COLLECTION	TITAN COLLECTION
	DIMENSIONS (L x W x H) in cm	600 x 595 x 585 cm
	IMPACT AREA	33,00 m²
	MAXIMUM CFH	150 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	40

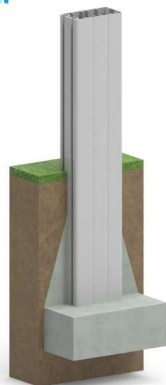
COMPOSITION

- n°4 rectangular aluminium posts 70x130mm
- n°5 aluminum load-bearing poles with square section 90x90mm
- n°3 non-slip aluminium decks with powder coated steel frame
- n°1 climbing ladders in powder coated steel
- n°2 HDPE climbing
- n°14 powder coated steel barriers
- n°8 HDPE barriers 15 mm thickness
- n°3 tube slides
- n°1 HDPE roof 15 mm thickness

- n°1 tube consisting of two curves 45°

PLAY PANELS
MUSICAL PLAY PANEL
x1

LUDIC PLAY PANEL
x1

EDUCATIONAL PLAY PANEL
x1

EDUCATIONAL PLAY PANEL
x1

EDUCATIONAL PLAY PANEL
x1
INSTALLATION

Where there is an aluminum pole, the plinth must be created directly on it.

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000