


CATALOG COLLECTION	TIKA LINE
DIMENSIONS (L x W x H) in cm	1170 x 425 x 355
MAXIMUM CFH	180
IMPACT ATTENUATING SURFACE	min. 86,25 m ² - MAX 116,25 m ²
SUGGESTED AGE OF USE	3 +

COMPOSITION	<ul style="list-style-type: none"> - n°12 70 x70 mm octagonal section aluminium structural poles - n°4 recycled anti-slip HDPE decks - n°2 roto-molded PTE guard panels - n°2 recycled HDPE and metal guard panels - n°4 recycled HDPE guard panels - n°5 recycled HDPE sheet decorations - n°1 roto-molded PTE modular slide H140 - n°1 roto-molded PTE modular tube slide H180 - n°1 roto-molded PTE modular double slide H180 - n°1 «TROTTOLO» play panel - n°1 «PUZZLE» play panel - n°1 stairs with recycled anti-slip HDPE treads - n°1 roto-molded PTE tunnel bridge - n°1 «GOBBE» bridge - n°1 stairs with recycled anti-slip HDPE treads
--------------------	--

SECURITY AREA

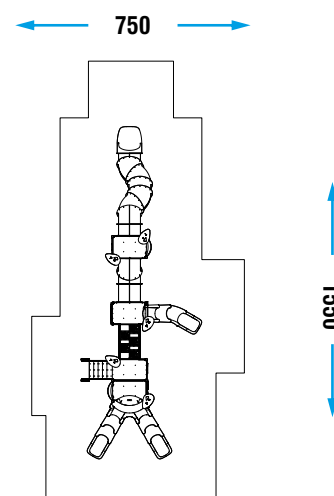

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.