

PRODUCT SHEET

REV 0.0 - EN202409

4506 AVALON



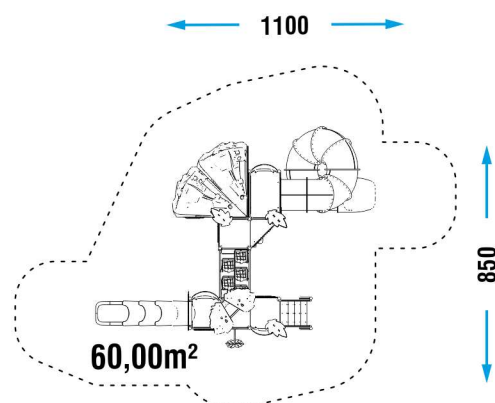
ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801



	CATALOG COLLECTION	TIKA LINE
	DIMENSIONS (L x W x H) in cm	695 x 550 x 400 cm
	IMPACT AREA	60,00 m ²
	MAXIMUM CFH	200 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	30

SECURITY AREA




COMPOSITION

- n° 15 70x70 octagonal profile aluminium structural posts
- n° 1 rotating mold PTE modular slide (H150)
- n° 1 rotating mold PTE spiral tube slide (H200)
- n° 1 HDPE sheet and metal roof
- n° 3 anti-slip HDPE square decks
- n° 3 anti-slip HDPE triangular decks
- n° 1 anti-slip HDPE rectangular deck
- n° 3 HDPE sheet guardpanels
- n° 5 open metal guardpanels
- n° 3 rotating mold PTE guardpanels
- n° 1 perch
- n° 1 «GOBBE» bridge
- n° 1 anti-slip HDPE stairs with anti-slip HDPE steps
- n° 1 HDPE crossbar
- n° 2 rotating mold PTE climber modules
- n° 4 HDPE sheet climbings
- HDPE sheet decorations

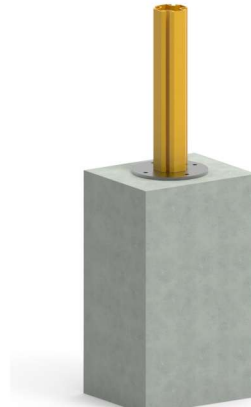
PLAY PANELS

LUDIC PLAY PANEL
x1

MUSICAL PLAY PANEL
x1

LUDIC PLAY PANEL
x1

MUSICAL PLAY PANEL
x1
INSTALLATION


Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000