


PRODUCT SHEET

4516 SATURNO



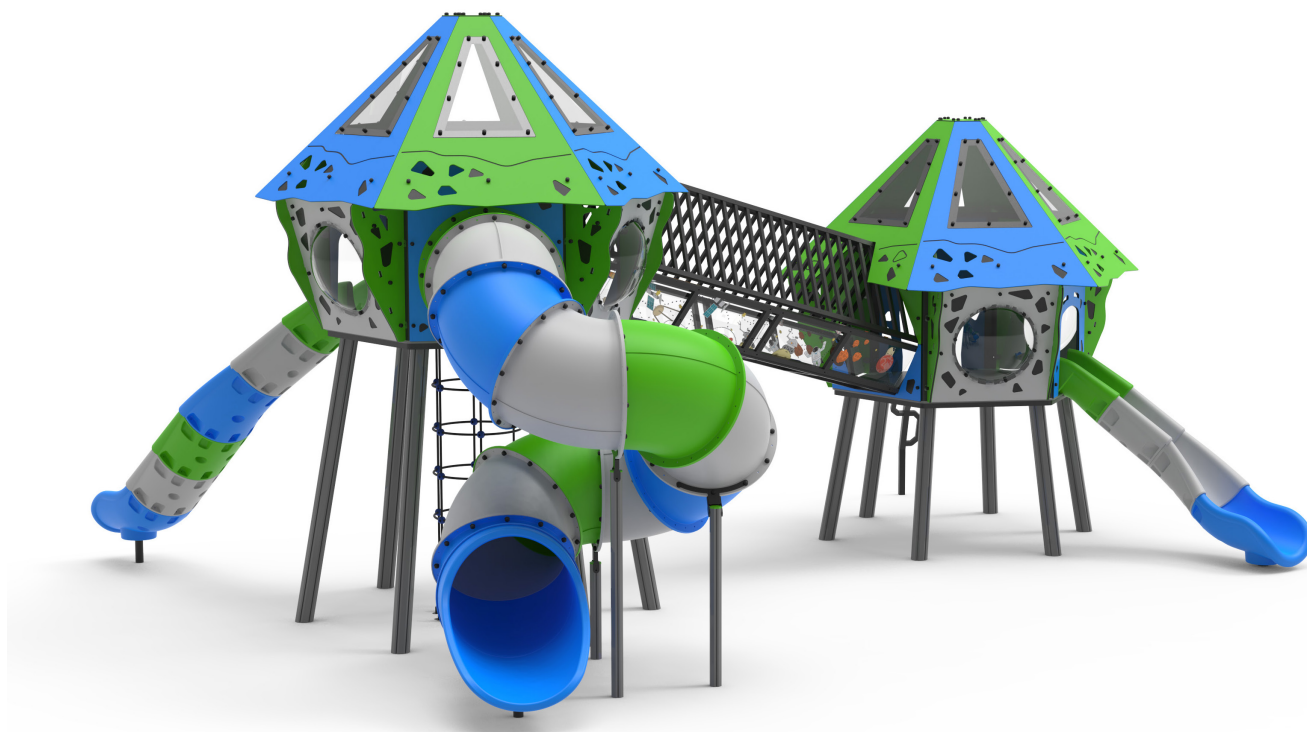


REV 0.0 - IT202509




SLIDING

CLIMBING



	CATALOG COLLECTION	ORBIT
	DIMENSIONS (L X W X H)	770 x 640 x 410
	IMPACT AREA	70,80 m ²
	MAXIMUM CFH	200 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	25

SECURITY AREA

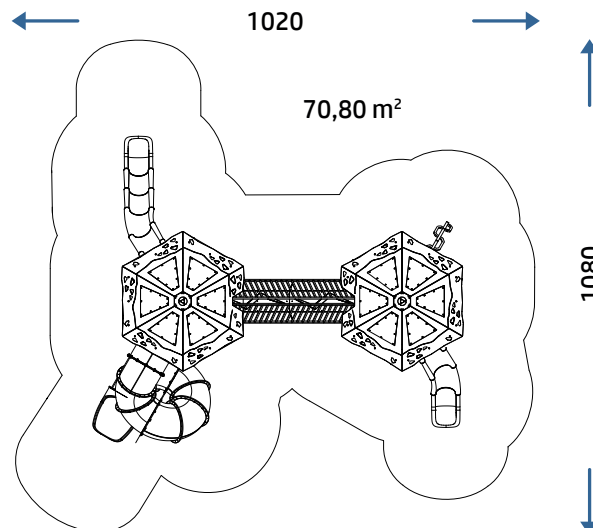

PRODUCT SHEET


4516 SATURNO

REV 0.0 - IT202509


COMPOSITION

- n° 12 120x120 mm hexagonal profile aluminum posts
- n° 2 HDPE sheet roof
- n° 1 "ROPES" climbing element
- n° 1 rotational molded PTE tube slides
- n° 6 Polycarbonate portholes
- n° 1 Metal skywalk
- n° 1 rotational molded PTE slide (H200)
- n° 1 rotational molded PTE slide (H120)
- n° 1 powder-coated stainless steel climbing ladder
- HDPE sheet barriers

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIAL (mm)	DESCRIPTION (mm)	MINIMUM DEPTH (mm) (b)	CRITICAL FALL HEIGHT (mm)
LAWN/SOIL			1000 (d)
BARK	20 TO 80 GRAIN SIZE	200	2000
		300	3000
WOOD CHIPS	20 TO 80 GRAIN SIZE	200	2000
		300	3000
SAND	20 TO 80 GRAIN SIZE	200	2000
		300	3000
GRAVEL	20 TO 80 GRAIN SIZE	200	2000
		300	3000
RUBBER SURFACING RESPONDENT TO HIC	THICKNESS 30 MM		DEPENDENT ON CERTIFICATION TESTS 1000
	THICKNESS 40 MM		1300
	THICKNESS 45 MM		1500
	THICKNESS 60 MM		2000
	THICKNESS 70 MM		2500
	THICKNESS 90 MM		3000