






## PRODUCT SHEET


REV 0.0 - IT202509

## 480 SERENGETI



	CATALOG COLLECTION	PARTY LINE
	<b>DIMENSIONS (L X W X H)</b>	705 x 753 x 340 cm
	<b>IMPACT AREA</b>	70,00 m <sup>2</sup>
	<b>MAXIMUM CFH</b>	150 cm
	<b>SUGGESTED AGE OF USE</b>	5+
	<b>NUMBER OF USERS</b>	25

### SECURITY AREA

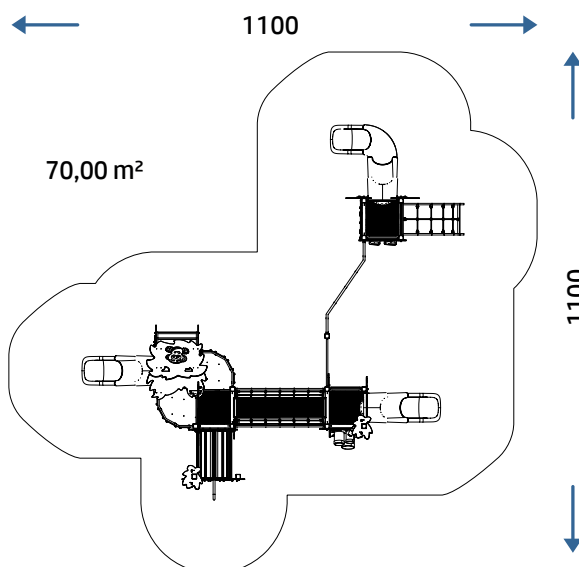

## PRODUCT SHEET


## 480 SERGENTI

REV 0.0 - IT202509

### COMPOSITION

- n° 18 90x90 mm square section aluminium structural posts
- n° 4 decks with powder-coated metal frame and aluminum slats
- n° 1 HDPE sheet roof and roto-molded PTE supports
- n° 2 open metal guard panels
- n° 2 round balconies
- n° 1 perch
- n° 2 HDPE sheet thrust bearings
- n° 2 powder-coated metal thrust bearing
- n° 1 powder-coated metal shaped thrust bearing
- n° 1 roto-molded PTE tunnel
- n° 1 powder-coated metal «ARCO» and HDPE sheet sides
- n° 1 rope «ARCO» climbing
- n° 1 «CORDA» bridge
- n° 2 HDPE sheet guard panels
- n° 1 HDPE sheet bench
- n° 1 two-rung powder-coated metal ladder
- n° 1 net frame
- n° 3 roto-molded PTE modular slides (H100, H110, H125)
- HDPE sheet decorations

### PLAY PANELS



LUDIC PLAY PANEL X1



LUDIC PLAY PANEL X1



LUDIC PLAY PANEL X1




EDUCATIONAL PLAY PANEL X1




MUSIC PLAY PANEL X1

### INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIAL (mm)	DESCRIPTION (mm)	MINIMUM DEPTH (mm) (b)	CRITICAL FALL HEIGHT (mm)
LAWN/SOIL			1000 (d)
BARK	20 TO 80 GRAIN SIZE	200 300	2000 3000
WOOD CHIPS	20 TO 80 GRAIN SIZE	200 300	2000 3000
SAND	20 TO 80 GRAIN SIZE	200 300	2000 3000
GRAVEL	20 TO 80 GRAIN SIZE	200 300	2000 3000
RUBBER SURFACING RESPONDENT TO HIC	THICKNESS 30 MM		DEPENDENT ON CERTIFICATION TESTS 1000
	THICKNESS 40 MM		1300
	THICKNESS 45 MM		1500
	THICKNESS 60 MM		2000
	THICKNESS 70 MM		2500
	THICKNESS 90 MM		3000