

# PRODUCT SHEET

REV 0.0 - IT202504

## 6054 ERIDANO




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
 EuCI European Certification Institute LTD  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
 EuCI European Certification Institute LTD  
 Certificate No.: GOTT2532E1801



### SECURITY AREA

650

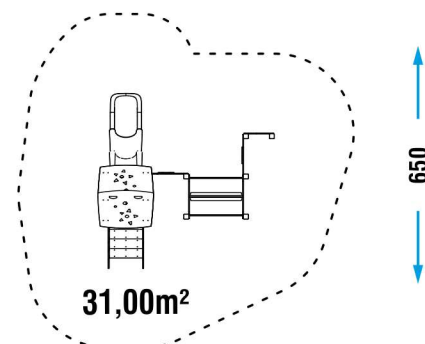

|                                                                                     | CATALOG COLLECTION                  | FUN COLLECTION       |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------|
|  | <b>DIMENSIONS (L x W x H) in cm</b> | 340 x 330 x 290 cm   |
|   | <b>IMPACT AREA</b>                  | 31,00 m <sup>2</sup> |
|  | <b>MAXIMUM CFH</b>                  | 85 cm                |
|  | <b>SUGGESTED AGE OF USE</b>         | 3+                   |
|  | <b>NUMBER OF USERS</b>              | 12                   |

# PRODUCT SHEET

REV 0.0 - IT202504

## 6054 ERIDANO



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate No: GOTT2532E1801


### COMPOSITION

- n° 10 90x90 mm square section timber or aluminum structural posts
- n° 1 deck with powder-coated metal frame and timber or aluminium slats
- n° 1 roto-molded PTE modular slide (H85)
- n° 1 HDPE sheet roof and roto-molded PTE supports
- n° 1 metal thrust bearing
- n° 2 HDPE sheet and metal guard panels
- n° 1 stairs with anti-slip recycled HDPE steps
- n° 1 tunnel in PTE rotazionale

### PLAY PANELS



**LUDIC PLAY PANEL**  
**x1**




**LUDIC PLAY PANEL**  
**x1**



**EDUCATIONAL PLAY PANEL**  
**x1**

### INSTALLATION

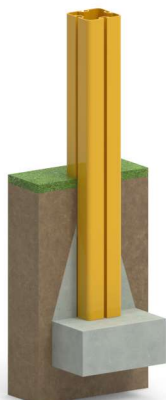

Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |