

PRODUCT SHEET

REV 0.0 - IT202504

792 TOKYO




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801



	CATALOG COLLECTION	ESA LINE
	DIMENSIONS (L x W x H) in cm	1350 x 1400 x 670 cm
	IMPACT AREA	137,50 m ²
	MAXIMUM CFH	200 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	70

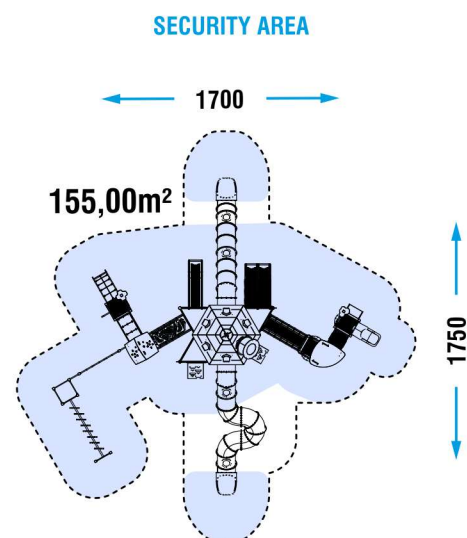

PRODUCT SHEET

REV 0.0 - IT202504

792 TOKYO



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801


COMPOSITION

- n° 10 Ø120 mm hexagonal section aluminum posts
- n° 25 90x90 mm square section aluminium structural posts
- n° 4 powder coated metal frame decks and aluminum slats
- n° 1 inclusive stairs
- n° 14 powder-coated chequered aluminium decks
- n° 1 hexagonal roof with roto-molded PTE tube
- n° 1 HDPE sheet roof
- n° 1 HDPE sheet roof with roto-molded PTE supports
- n° 8 closed metal guard panels
- n° 3 open metal guard panels
- n° 1 open metal guard panel for perch
- n° 2 roto-molded PTE guard panels
- n° 1 fireman's post
- n° 19 HDPE sheet guard panels
- n° 3 HDPE sheet climbings
- n° 2 roto-molded PTE climbings
- n° 2 HDPE sheet thrust bearings
- n° 1 metal thrust bearing
- n° 1 rope «ARCO» climbing
- n° 1 «WOBBLE» bridge
- n° 1 «CORDE» bridge
- n° 1 «JOLLY» bridge
- n° 1 «JOLLY» net frame
- n° 2 4-rung backrests
- n° 3 2-rung backrests
- n° 1 round balcony
- n° 1 metal handrail with rings
- n° 1 roto-molded PTE modular slide (H60)
- n° 1 roto-molded PTE double modular slide (H125)
- n° 1 roto-molded PTE single slide (H125)
- n° 2 roto-molded PTE tube modular slides (H300)

PLAY PANELS




MUSICAL PLAY PANEL
x1



LUDIC PLAY PANEL
x1




LUDIC PLAY PANEL
x1




LUDIC PLAY PANEL
x1

INSTALLATION

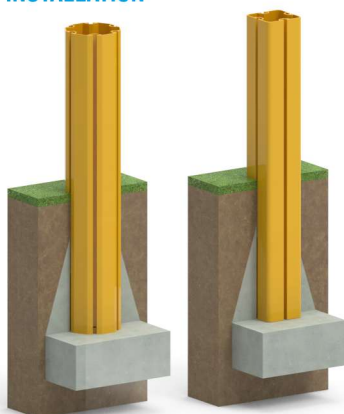

Where there is an aluminum pole, the plinth must be created directly on it.

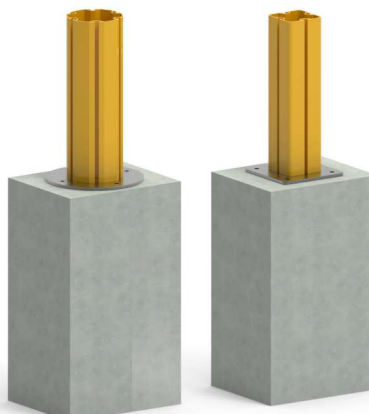

If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000