

PRODUCT SHEET

REV 3.0 - EN202411

913 ALTALENA

4 POSTI CON NIDO




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT25201902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No: GOTT25201901




SWINGING



CATALOG COLLECTION	PLAYGROUND ESSENTIALS
DIMENSIONS (L x W x H) in cm	670 x 215 x 240
MAXIMUM CFH	135
IMPACT ATTENUATING SURFACE	min. 42,00 m ² - MAX 66,50 m ²
SUGGESTED AGE OF USE	3+
COMPOSITION	swing built up with 90x90mm aluminium alloy 2,5mm thick profiles with top pyramidal polyurethane caps support poles and beam. Equipped with n°2 shock absorber rubber seats with inner metal structure held by security galvanized chains and n°1 Ø120cm PE basket with shock-absorb rubber border. Lubrication free suspension and articulation joint system. Upper decorations with engraved HDPE sheet.

SECURITY AREA

709

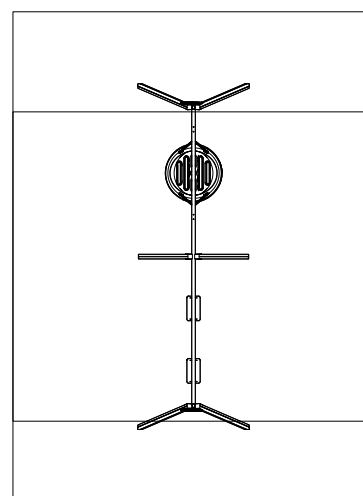

935

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.