

# PRODUCT SHEET

REV 0.0 - IT202502

## 955 JUMPING




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No: GOTT2532E1801



|                                                                                     | CATALOG COLLECTION                  | CLASSIC COLLECTION   |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------|
|  | <b>DIMENSIONS (L x W x H) in cm</b> | 380 x 520 x 340 cm   |
|   | <b>IMPACT AREA</b>                  | 43,50 m <sup>2</sup> |
|  | <b>MAXIMUM CFH</b>                  | 140 cm               |
|  | <b>SUGGESTED AGE OF USE</b>         | 3+                   |
|  | <b>NUMBER OF USERS</b>              | 15                   |

### SECURITY AREA

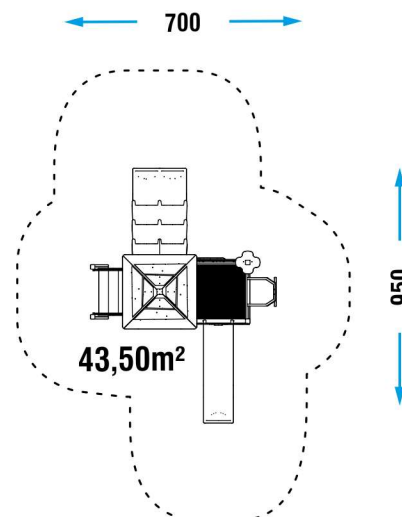

# PRODUCT SHEET

REV 0.0 - IT202502

## 955 JUMPING



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate No.: GOTT2532E1801

### COMPOSITION

- n° 6 90x90 square section aluminum structural posts
- n° 2 decks with powder-coated metal frame and aluminium slats
- n° 1 pyramid roof in rotational mold PTE
- n° 2 HDPE and metal guard panels
- n° 1 stairs with recycled anti-slip HDPE steps
- n° 1 roto-molded PTE modular slide (H140)
- n° 1 roto-molded PTE double modular slide (H125)
- n° 2 HDPE thrust bearings
- n° 1 «ZIG ZAG» metal perch

### PLAY PANELS




**LUDIC PLAY PANEL**  
x1



**MUSICAL PLAY PANEL**  
x1

### INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |