

PRODUCT SHEET


REV 0.0 - IT202505

H110 TULIP




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801

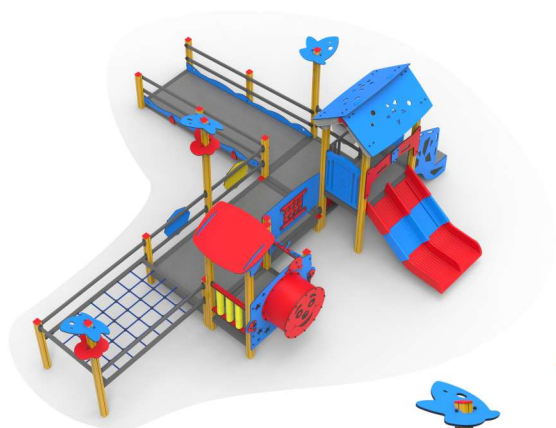

SECURITY AREA

950

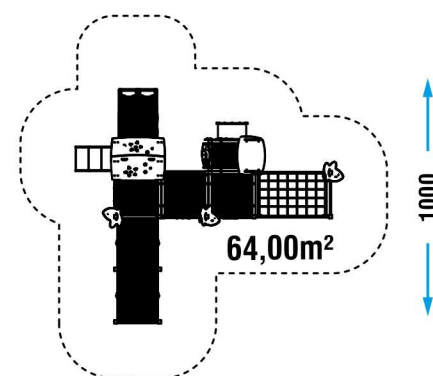

	CATALOG COLLECTION	LET'S PLAY TOGETHER
	DIMENSIONS (L x W x H) in cm	700 x 640 x 285 cm
	IMPACT AREA	64,00 m ²
	MAXIMUM CFH	90 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	18

PRODUCT SHEET

REV 0.0 - IT202505

H110 TULIP




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801


COMPOSITION

- n° 24 90x90 mm square section aluminum structural posts
 - n° 5 decks with powder-coated metal frame and aluminum slats
 - n° 1 easy accessible ramp
 - n° 1 open metal guard panel
 - n° 1 roto-molded PTE guard panel
 - n° 1 net frame with metal tubular side protections
 - n° 1 gable roof in HDPE sheet and roto-molded PTE supports
 - n° 1 HDPE sheet roof
 - n° 1 HDPE sheet climbing
 - n° 1 HDPE sheet guard panel
- with roto-molded PTE tube
 - n° 1 accessible stairs with HDPE sheet sides and powder-coated chequered aluminum steps
 - n° 1 HDPE sheet thrust bearing
 - n° 1 roto-molded PTE double modular slide (H90)
 - HDPE sheet decorations

PLAY PANELS



LUDIC PLAY PANEL
x1



LUDIC PLAY PANEL
x1




LUDIC PLAY PANEL
x1



LUDIC PLAY PANEL
x1




LUDIC PLAY PANEL
x1



LUDIC PLAY PANEL
x1

INSTALLATION

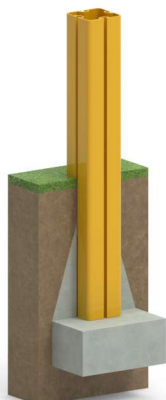

Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000