

PRODUCT SHEET


REV 2.1 - EN202003

H160 RINGO



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1932

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532E1901

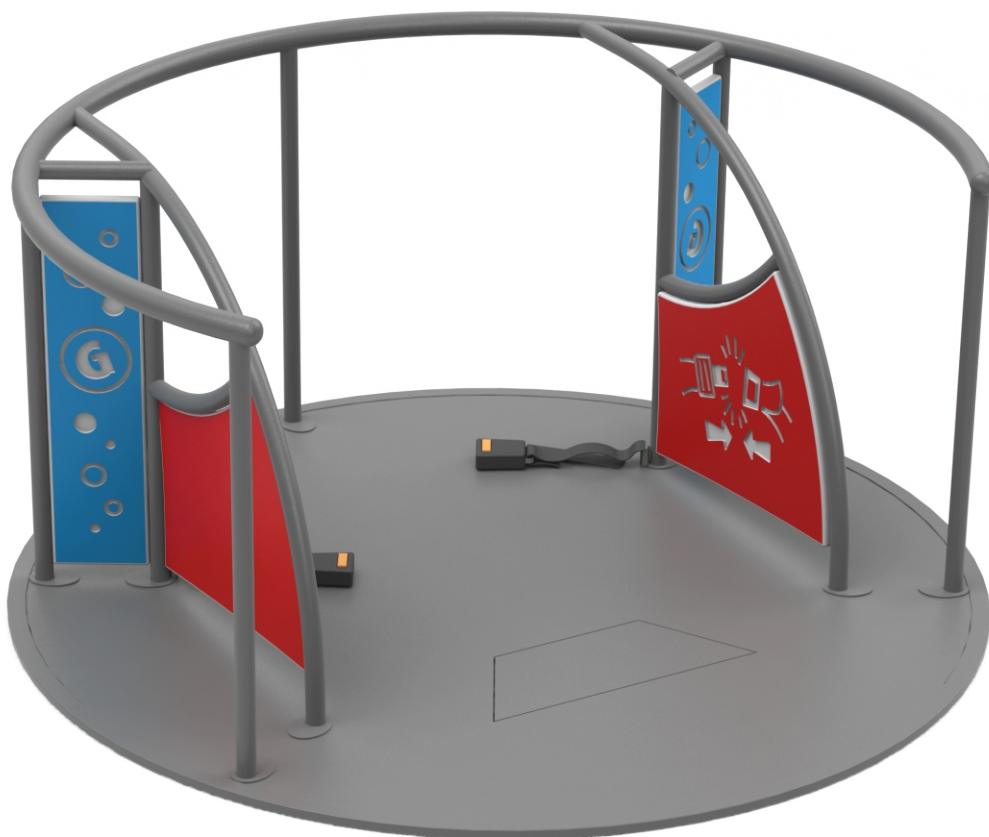


ROTATING



CATALOG COLLECTION	LET'S PLAY TOGETHER
DIMENSIONS (L x W x H) in cm	Ø155 x 90
MAXIMUM CFH	-
IMPACT ATTENUATING SURFACE	min. 42,25 m² - MAX 42,25 m²
SUGGESTED AGE OF USE	3+
COMPOSITION	Powder coated aluminium treadplate 3+2mm thick sheet with inspection window. Powder coated metal tubular structure with HDPE sheet guardpanels. Central space for n°1 user on a wheelchair.

655

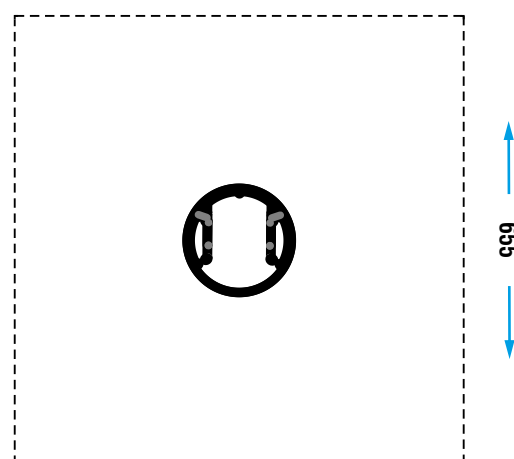

H160 CAROUSEL IS DESIGNED EXCLUSIVELY FOR WHEELCHAIR USERS.

Once on deck, the wheelchair must be blocked with proper brakes.

Spinning of carousel must be controlled exclusively by an able-bodied operator outside equipment. For this equipment **the presence of a supervisor of the whole area is mandatory**. It's also mandatory to make **able-bodied users to not access equipment**, especially during closing hours of the playing area. That's to prevent improper use of equipment and its damage.

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.