






PRODUCT SHEET


0960 PORT ROYAL

REV 0.0 - IT202509



	CATALOG COLLECTION	PARTY LINE
	DIMENSIONS (L X W X H)	1960 x 685 x 665 cm
	IMPACT AREA	139,00 m ²
	MAXIMUM CFH	150 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	25

SECURITY AREA

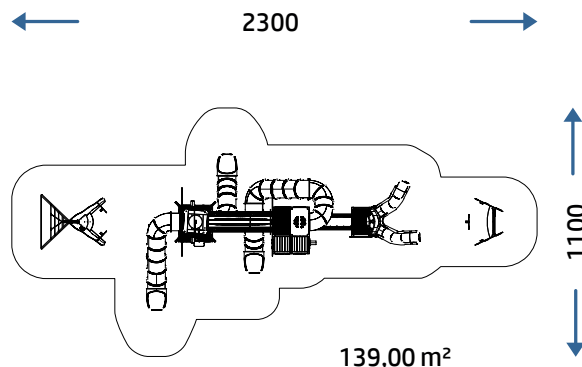

PRODUCT SHEET

0960 PORT ROYAL


REV 0.0 - IT202509

COMPOSITION


- n° 13 90x90 mm square section aluminum structural posts
- n° 12 130x70 mm rectangular section aluminum structural posts
- n° 8 decks with powder-coated metal frame and aluminum slats
- n° 3 powder-coated chequered aluminum decks
- n° 2 HDPE sheet roofs
- n° 15 closed metal guard panels
- n° 6 open metal guard panels
- n° 10 HDPE sheet guard panels
- n° 1 roto-molded PTE double

- modular slide (H125)
- n° 3 roto-molded PTE tube modular slide (H150, H240, H385)
- n° 1 3-rung backrest
- n° 1 metal step ladder
- n° 8 HDPE sheet climbings
- n° 1 rope climbing
- n° 1 «CORDE» bridge
- n° 1 rope passage with metal tubular barriers and screen-printed polycarbonate panels
- n° 2 benches
- HDPE sheet decorations


PLAY PANELS



LUDIC PLAY PANEL X1



LUDIC PLAY PANEL X1



LUDIC PLAY PANEL X1



LUDIC PLAY PANEL X1



LUDIC PLAY PANEL X1




EDUCATIONAL PLAY PANEL X1



EDUCATIONAL PLAY PANEL X1



MUSICAL PLAY PANEL X1



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

ce according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIAL (mm)	DESCRIPTION (mm)	MINIMUM DEPTH (mm) (b)	CRITICAL FALL HEIGHT (mm)
LAWN/SOIL			1000 (d)
BARK	20 TO 80 GRAIN SIZE	200 300	2000 3000
WOOD CHIPS	20 TO 80 GRAIN SIZE	200 300	2000 3000
SAND	20 TO 80 GRAIN SIZE	200 300	2000 3000
GRAVEL	20 TO 80 GRAIN SIZE	200 300	2000 3000
RUBBER SURFACING RESPONDENT TO HIC	THICKNESS 30 MM		DEPENDENT ON CERTIFICATION TESTS 1000
	THICKNESS 40 MM		1300
	THICKNESS 45 MM		1500
	THICKNESS 60 MM		2000
	THICKNESS 70 MM		2500
	THICKNESS 90 MM		3000