

# PRODUCT SHEET


REV 0.0 - IT202502

## 4003 DANA




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No.: GOTT2532E1801

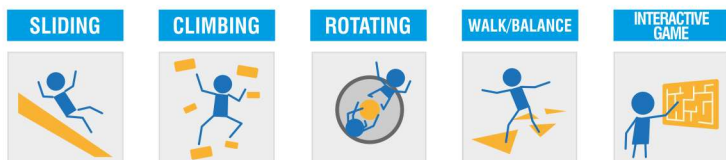

|                                                                                     | CATALOG COLLECTION                  | TIKA LINE            |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------|
|  | <b>DIMENSIONS (L x W x H) in cm</b> | 550 x 440 x 300 cm   |
|   | <b>IMPACT AREA</b>                  | 42,50 m <sup>2</sup> |
|  | <b>MAXIMUM CFH</b>                  | 100 cm               |
|  | <b>SUGGESTED AGE OF USE</b>         | 3+                   |
|  | <b>NUMBER OF USERS</b>              | 12                   |

### SECURITY AREA

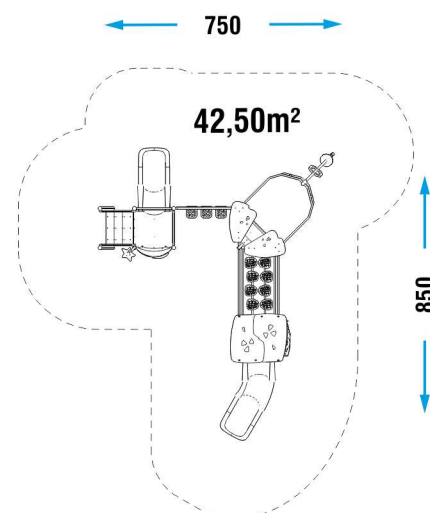

# PRODUCT SHEET

REV 0.0 - IT202502

## 4003 DANA



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
**EuCI European Certification Institute LTD**  
 Certificate No.: GOTT2532E1801

### COMPOSITION

- n° 11 70 x70 mm octagonal section aluminium structural posts
- n° 3 recycled anti-slip HDPE decks
- n° 1 recycled HDPE sheet gable roof
- n° 1 recycled HDPE sheet and metal roof
- n° 3 open metal guard panels
- n° 2 roto-molded PTE guard panels
- n° 1 recycled HDPE guard panel
- n° 1 stairs with recycled anti-slip HDPE treads
- n° 2 roto-molded PTE modular slides H100, H60
- n° 1 recycled HDPE sheet bench
- n° 1 recycled HDPE sheet decoration
- n° 1 spinner
- n° 1 «VELA» bridge
- n° 1 «FUNGHI» bridge
- n° 1 recycled HDPE sheet climbing

### PLAY PANELS




**LUDIC PLAY PANEL**  
**x1**

### INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.

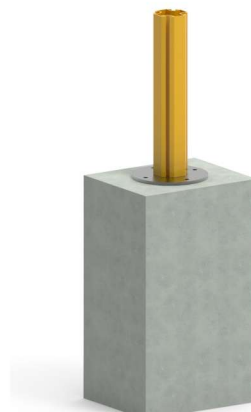

If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |