

# PRODUCT SHEET


REV 0.0 - EN202409

## 4508 ELDORIA




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No.: GOTT2532E1801

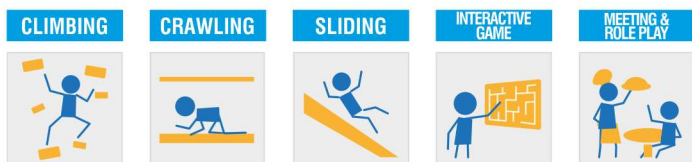

### SECURITY AREA

900

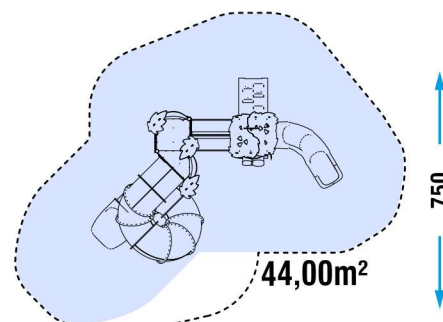

|                                                                                     | CATALOG COLLECTION                  | TIKA LINE          |
|-------------------------------------------------------------------------------------|-------------------------------------|--------------------|
|  | <b>DIMENSIONS (L x W x H) in cm</b> | 575 x 425 x 360 cm |
|   | <b>IMPACT AREA</b>                  | 41,00 m²           |
|  | <b>MAXIMUM CFH</b>                  | 200 cm             |
|  | <b>SUGGESTED AGE OF USE</b>         | 5+                 |
|  | <b>NUMBER OF USERS</b>              | 15                 |

# PRODUCT SHEET

REV 0.0 - EN202409

## 4508 ELDORIA



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
 ISO 9001:2015 CERTIFIED by  
 EuCI European Certification Institute LTD  
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
 ISO 14001:2015 CERTIFIED by  
 EuCI European Certification Institute LTD  
 Certificate No.: GOTT2532E1801


### COMPOSITION

- n° 9 70x70 octagonal aluminium profile structural posts
- n° 1 rotating mold PTE tube slide (H200)
- n° 1 rotating mold PTE modular slide (H140)
- n° 2 anti-slip recycled HDPE square decks
- n° 1 anti-slip recycled HDPE triangular deck
- n° 1 HDPE sheet roof
- n° 3 rotating mold PTE guardpanels
- n° 1 rotational PTE climbing
- n° 2 HDPE sheet climbings
- n° 1 HDPE crossbar
- n° 1 tunnel
- HDPE sheet decorations

### PLAY PANELS



LUDIC PLAY PANEL  
x1



LUDIC PLAY PANEL  
x1




MUSICAL PLAY PANEL  
x1

### INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.

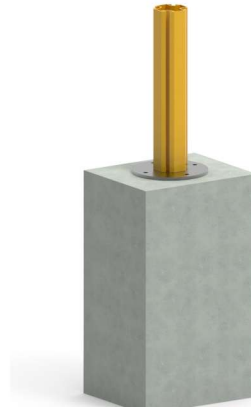

If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |