

PRODUCT SHEET

REV 0.0 - IT202502

6000 AUSTRALIA



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
 EuCI European Certification Institute LTD
 Certificate No: GOTT2532E1801



SLIDING



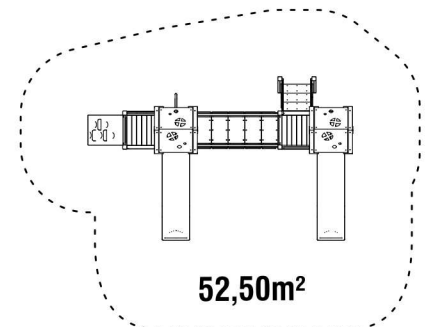
CLIMBING








SECURITY AREA

900

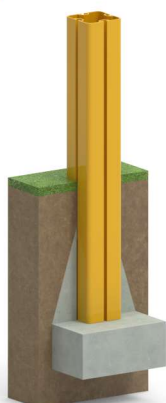
700



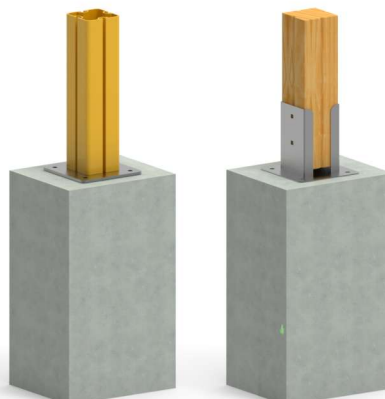
	CATALOG COLLECTION	FUN COLLECTION
	DIMENSIONS (L x W x H) in cm	590 x 360 x 330 cm
	IMPACT AREA	52,50 m ²
	MAXIMUM CFH	140 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	20

COMPOSITION

- n° 12 90x90 mm square section timber or aluminum structural posts
 - n° 4 decks with powder-coated metal frame and timber or aluminium slats
 - n° 2 HDPE sheet roofs with roto-molded PTE supports
 - n° 1 «ARCO» bridge
 - n° 2 roto-molded PTE guard panels
 - n° 2 HDPE sheet and metal guard panels
 - n° 1 open metal guard panel
 - n° 1 fireman's pole
- n° 1 stairs with recycled anti-slip HDPE steps
 - n° 1 roto-molded PTE climbing
 - n° 1 roto-molded PTE slide (H125)
 - n° 1 roto-molded PTE slide (H140)

PLAY PANELS
INSTALLATION


Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC	SPESSORE/THICKNESS	30mm	1000
		40mm	1300
		45mm	1500
		60mm	2000
		70mm	2500
		90mm	3000
			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS