

PRODUCT SHEET

REV 0.0 - IT202509

0994 BELINDA




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801



SECURITY AREA

1100

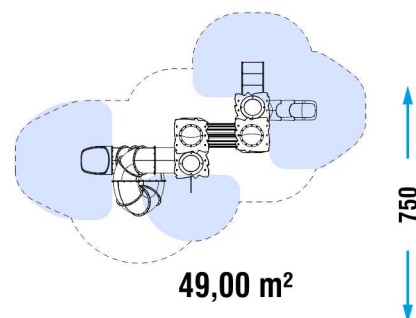

	CATALOG COLLECTION	TITAN COLLECTION
	DIMENSIONS (L x W x H) in cm	700 x 470 x 545 cm
	IMPACT AREA	30,00 m²
	MAXIMUM CFH	90 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	35

PRODUCT SHEET


REV 0.0 - IT202509

0994 BELINDA

COMPOSITION

- n° 12 square aluminum poles section. 90x90mm
- n° 8 powder-coated stainless steel footrests and non-slip aluminum slats
- n° 6 HDPE slab climbs sp.19mm
- n° 2 tunnels in rotational PTE
- n° 1 spiral tube slide (H270cm)
- n° 1 modular slide (H90cm)
- n° 4 HDPE slab roofs 15 mm thick
- n° 1 accessible staircase (H90cm)
- n° 1 ladder in powder coated stainless steel
- n° 3 decorative spherical polycarbonate portholes Ø60cm
- n° 10 powder-coated electro-welded mesh barriers
- n° 2 HDPE benches
- HDPE panels
- HDPE decorations

PLAY PANELS



LUDIC PLAY PANELS
x1



LUDIC PLAY PANELS
x1



EDUCATIONAL PLAY PANEL
x1



LUDIC PLAY PANELS
x1



LUDIC PLAY PANELS
x1




MUSICAL PLAY PANELS
x1



PANNELLI SENSORIALI
x2

INSTALLATION

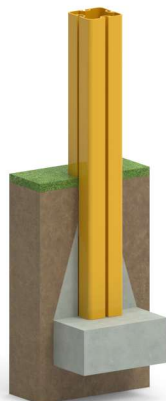

Where there is an aluminum pole, the plinth must be created directly on it.

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000