

# PRODUCT SHEET


REV 0.0 - IT202502

## 4303 JUJU



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902


ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No.: GOTT2532E1801

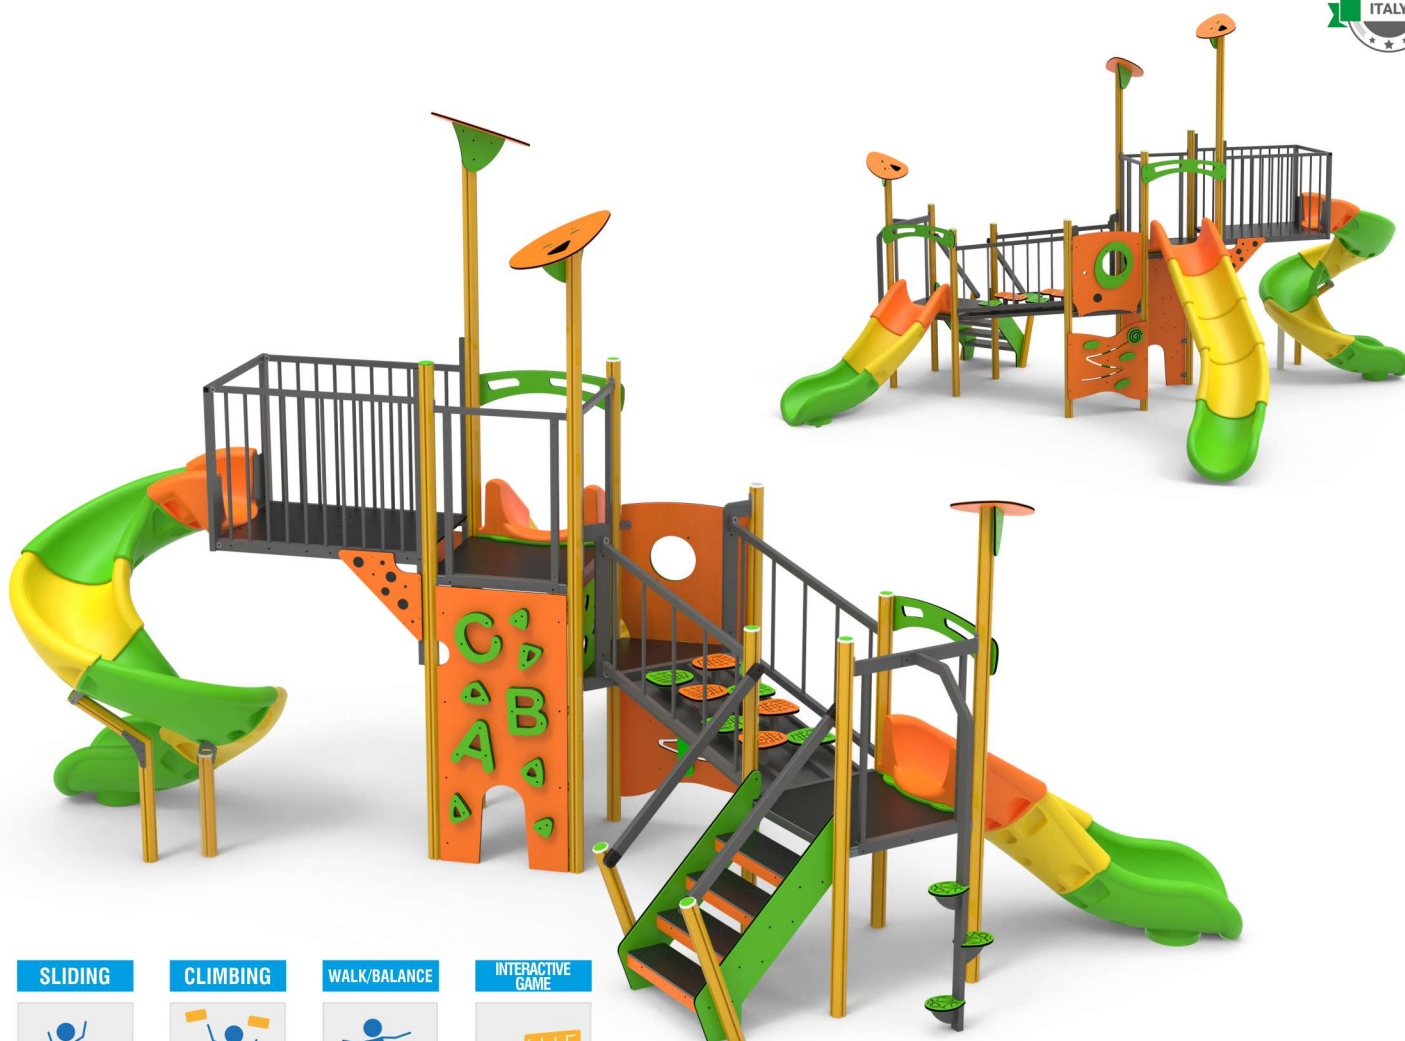

### SECURITY AREA

800


|                                                                                     | CATALOG COLLECTION                  | TIKA LINE            |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------|
|  | <b>DIMENSIONS (L x W x H) in cm</b> | 510 x 620 x 380 cm   |
|   | <b>IMPACT AREA</b>                  | 47,00 m <sup>2</sup> |
|  | <b>MAXIMUM CFH</b>                  | 160 cm               |
|  | <b>SUGGESTED AGE OF USE</b>         | 3+                   |
|  | <b>NUMBER OF USERS</b>              | 16                   |

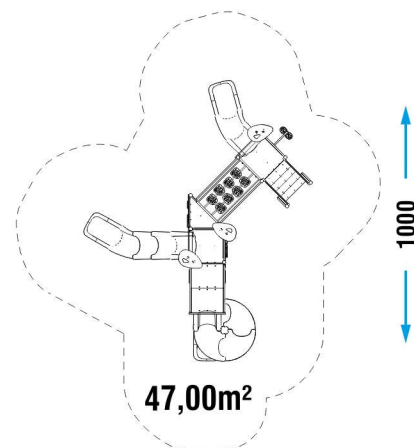

### COMPOSITION

- n° 9 70 x70 mm octagonal section aluminium structural poles
- n° 4 recycled anti-slip HDPE decks
- n° 2 closed metal guard panels
- n° 3 open metal guard panels
- n° 3 recycled HDPE sheet decorations
- n° 1 stairs with recycled anti-slip HDPE treads
- n° 2 roto-molded PTE modular slides H80, H150
- n° 1 roto-molded PTE modular spiral slide H160
- n° 1 recycled HDPE guard panel
- n° 2 HDPE sheet climbings
- n° 1 «FUNGHI» bridge
- n° 1 metal perch

### PLAY PANELS




LUDIC PLAY PANEL  
x1

### INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.

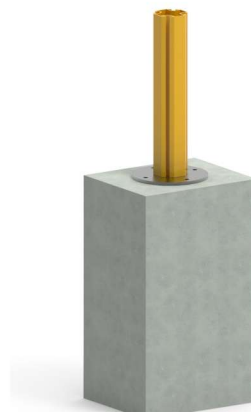

If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIALE (mm)<br>MATERIAL (mm)                                                       | DESCRIZIONE (mm)<br>DESCRIPTION (mm)        | PROFONDITÀ MINIMA (mm) (b)<br>MINIMUM DEPTH (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm)<br>CRITICAL FALL HEIGHT (mm)      |
|---------------------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|
| PRATO/TERRICCIO<br>LAWN/SOIL                                                          |                                             |                                                      | 1000 (d)                                                         |
| CORTECCIA<br>BARK                                                                     | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| TRUCIOLI DI LEGNO<br>WOOD CHIPS                                                       | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| SABBIA<br>SAND                                                                        | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| GHIAIA<br>GRAVEL                                                                      | PEZZATURA DA 20 A 80<br>20 TO 80 GRAIN SIZE | 200<br>300                                           | 2000<br>3000                                                     |
| PAVIMENTAZIONE IN GOMMA<br>RISPONDENTE A HIC<br>RUBBER SURFACING<br>RESPONDENT TO HIC |                                             |                                                      | SOTTOPOSTA A PROVE DI CADUTA<br>DEPENDENT ON CERTIFICATION TESTS |
|                                                                                       | SPESSORE/THICKNESS 30mm                     |                                                      | 1000                                                             |
|                                                                                       | SPESSORE/THICKNESS 40mm                     |                                                      | 1300                                                             |
|                                                                                       | SPESSORE/THICKNESS 45mm                     |                                                      | 1500                                                             |
|                                                                                       | SPESSORE/THICKNESS 60mm                     |                                                      | 2000                                                             |
|                                                                                       | SPESSORE/THICKNESS 70mm                     |                                                      | 2500                                                             |
|                                                                                       | SPESSORE/THICKNESS 90mm                     |                                                      | 3000                                                             |