

PRODUCT SHEET

REV 0.0 - IT202502

570 LAVAREDO




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801




CRAWLING



SLIDING



INTERACTIVE GAME



CLIMBING




WALK/BALANCE



SECURITY AREA

1050

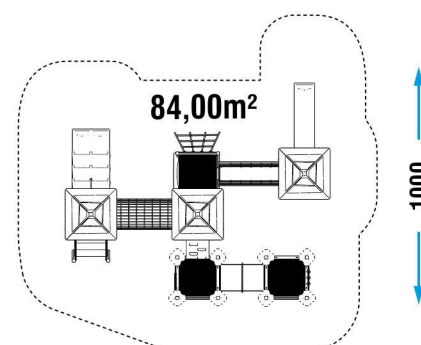

	CATALOG COLLECTION	CLASSIC COLLECTION
	DIMENSIONS (L x W x H) in cm	785 x 660 x 380 cm
	IMPACT AREA	84,00 m²
	MAXIMUM CFH	140 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	25

PRODUCT SHEET

REV 0.0 - IT202502

570 LAVAREDO




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801

COMPOSITION

- n° 22 90 x90 mm square section aluminium structural posts
- n° 6 decks with powder-coated metal frame and aluminium slats
- n° 3 pyramid roofs in rotational mold PTE
- n° 2 open metal guard panels
- n° 3 roto-molded PTE and metal sheet guard panels
- n° 4 recycled HDPE and metal guard panels
- n° 1 stairs with recycled anti-slip HDPE steps
- n° 1 roto-molded PTE modular slide (H140)
- n° 1 roto-molded PTE double modular slide (H125)
- n° 2 recycled HDPE thrust bearings
- n° 1 «CORDE» bridge
- n° 1 «TUNNEL DI RETE» bridge
- n° 1 roto-molded PTE tunnel
- n° 1 rope climbing
- n° 1 roto-molded PTE climbing
- n°8 recycled HDPE decors

PLAY PANELS




LUDIC PLAY PANEL
x1



LUDIC PLAY PANEL
x1




MUSICAL PLAY PANEL
x1



EDUCATIONAL PLAY PANEL
x1

INSTALLATION

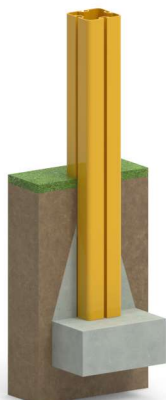

Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000