

PRODUCT SHEET

REV 0.0 - IT202502

4304 LAURUS



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No.: GOTT2532E1801



SLIDING



CLIMBING



HANGING




INTERACTIVE GAME



	CATALOG COLLECTION	TIKA LINE
	DIMENSIONS (L x W x H) in cm	1085 x 765 x 400 cm
	IMPACT AREA	93,00 m ²
	MAXIMUM CFH	230 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	40

SECURITY AREA

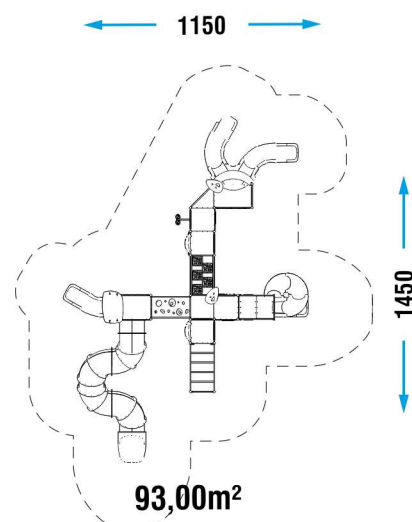

PRODUCT SHEET

REV 0.0 - IT202502

4304 LAURUS



ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
 ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
 ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
 Certificate No.: GOTT2532E1801


COMPOSITION

- n° 23 70 x70 mm octagonal section aluminium structural poles
- n° 10 recycled anti-slip HDPE decks
- n° 7 open metal guard panels
- n° 2 closed metal guard panels
- n° 7 recycled HDPE and metal guard panels
- n° 2 roto-molded PTE guard panels
- n° 2 recycled HDPE guard panels
- n° 1 roto-molded PTE modular slide H90
- n° 1 roto-molded PTE spiral modular slide H160
- n° 1 roto-molded PTE tube modular slide H230
- n° 1 roto-molded PTE double modular slide H125
- n° 1 metal perch
- n° 2 metal ladder
- n° 1 «GOBBE» bridge
- n° 1 slot rampe bridge
- n° 1 recycled HDPE sheet climbing

PLAY PANELS



LUDIC PLAY PANEL
x1




LUDIC PLAY PANEL
x1

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.

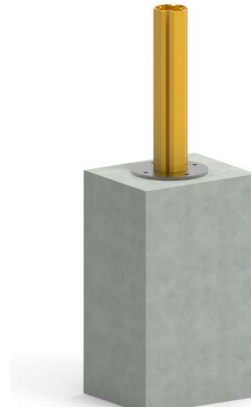

If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200 300	2000 3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC			SOTTOPOSTA A PROVE DI CADUTA DEPENDENT ON CERTIFICATION TESTS
	SPESSORE/THICKNESS 30mm		1000
	SPESSORE/THICKNESS 40mm		1300
	SPESSORE/THICKNESS 45mm		1500
	SPESSORE/THICKNESS 60mm		2000
	SPESSORE/THICKNESS 70mm		2500
	SPESSORE/THICKNESS 90mm		3000