







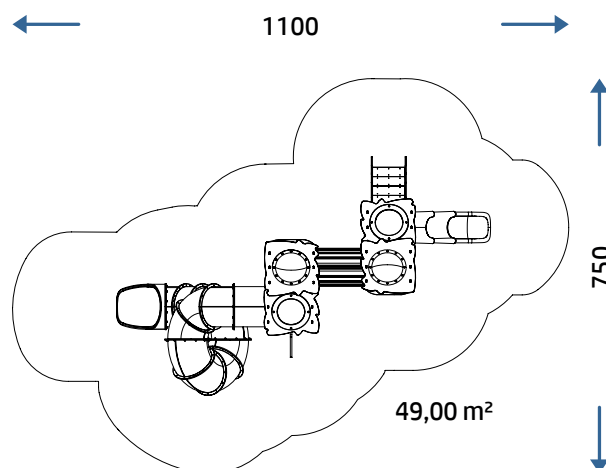
PRODUCT SHEET

0994 BELINDA

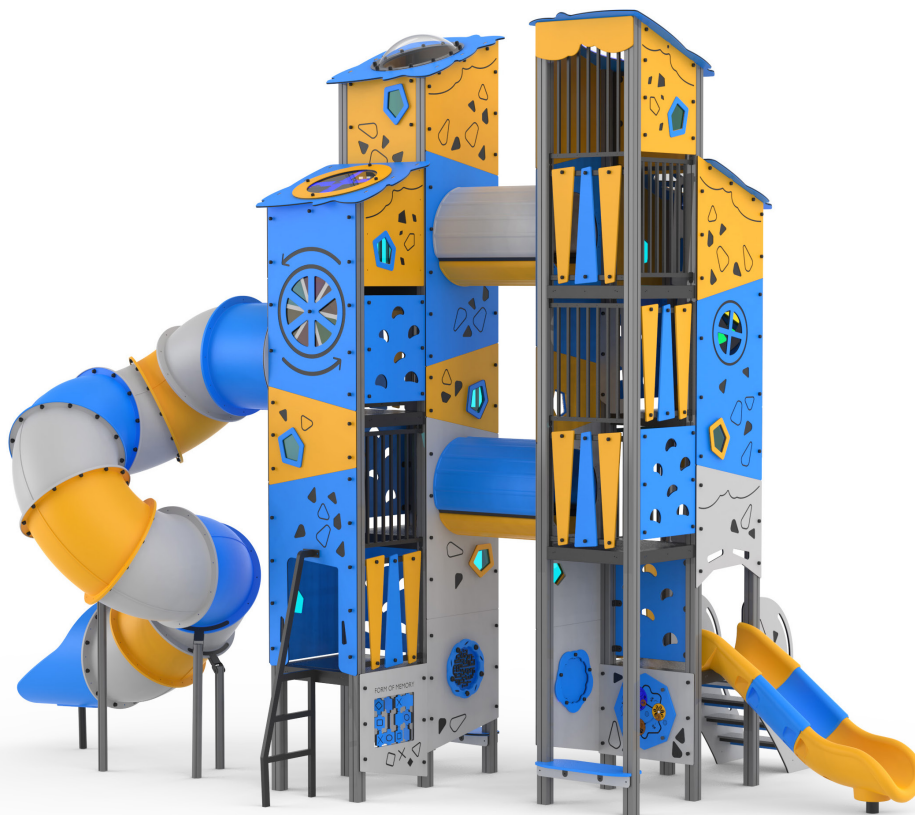

SECURITY AREA

	CATALOG COLLECTION	TITAN COLLECTION
	DIMENSIONS (L X W X H)	700x470x545 cm
	IMPACT AREA	30,00 m ²
	MAXIMUM CFH	90 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	35



PRODUCT SHEET


0994 BELINDA

REV 0.0 - IT202509

COMPOSITION

- n° 12 square aluminum poles section. 90x90mm
- n° 8 powder-coated stainless steel footrests and non-slip aluminum slats
- n° 6 HDPE slab climbs sp.19mm
- n° 2 tunnels in rotational PTE
- n° 1 spiral tube slide (H270cm)
- n° 1 modular slide (H90cm)
- n° 4 HDPE slab roofs 15 mm thick
- n° 1 accessible staircase (H90cm)
- n° 1 ladder in powder coated stainless steel
- n° 3 decorative spherical polycarbonate portholes Ø60cm
- n° 10 powder-coated electro-welded mesh barriers
- n° 2 HDPE benches
- HDPE panels
- HDPE decorations

PANNELLI GIOCO



LUDIC PLAY
PANEL X1



LUDIC PLAY
PANEL X1



EDUCATIONAL
PLAY PANEL X1



LUDIC PLAY
PANEL X1



LUDIC PLAY
PANEL X1




MUSIC PLAY
PANEL X1




SENSORY PLAY
PANEL X1

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIAL (mm)	DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm)
LAWN/SOIL			1000 (d)
BARK	20 TO 80 GRAIN SIZE	200 300	2000 3000
WOOD CHIPS	20 TO 80 GRAIN SIZE	200 300	2000 3000
SAND	20 TO 80 GRAIN SIZE	200 300	2000 3000
GRAVEL	20 TO 80 GRAIN SIZE	200 300	2000 3000
RUBBER SURFACING RESPONDENT TO HIC	THICKNESS 30 MM		DEPENDING ON CERTIFICATION TESTS 1000
	THICKNESS 40 MM		1300
	THICKNESS 45 MM		1500
	THICKNESS 60 MM		2000
	THICKNESS 70 MM		2500
	THICKNESS 90 MM		3000