


PRODUCT SHEET
REV 0.0 - EN202409
4505 ARCADIA




ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM
ISO 9001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate N.: GOTT2532Q1902



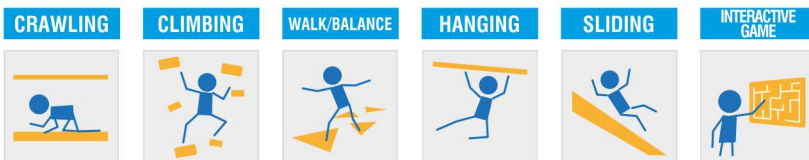


ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001:2015 CERTIFIED by
EuCI European Certification Institute LTD
Certificate No: GOTT2532E1801

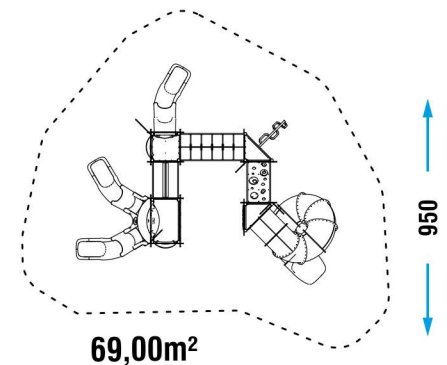

SECURITY AREA

1050



	CATALOG COLLECTION	TIKA LINE
	DIMENSIONS (L x W x H) in cm	730 x 620 x 450 cm
	IMPACT AREA	69,00 m ²
	MAXIMUM CFH	200 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	30


COMPOSITION

- n° 14 octagonal profile aluminium structural posts 70x70
- n° 1 rotating mold PTE double modular slide (H120)
- n° 1 rotating mold PTE modular slide (H120)
- n° 1 rotating mold PTE tube slide (H200)
- n° 1 anti-slip HDPE square deck
- n° 2 anti-slip HDPE triangular decks
- n° 1 anti-slip HDPE rectangular deck
- n° 2 HDPE sheet and metal guardpanels
- n° 1 HDPE crossbar
- n° 1 open metal guardpanel
- n° 2 rotating mold PTE guardpanels
- n° 1 metal arch climbing with handles
- n° 1 «CORDE» bridge
- n° 1 «RAMPA INCLINATA» bridge
- n° 1 tunnel
- n° 5 HDPE sheet flags decorations
- HDPE sheet decorations

PLAY PANELS




LUDIC PLAY PANEL
x1



LUDIC PLAY PANEL
x1

INSTALLATION

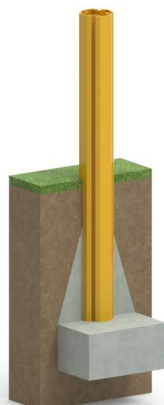

Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC	SPESSORE/THICKNESS	30mm	1000
		40mm	1300
		45mm	1500
		60mm	2000
		70mm	2500
		90mm	3000