

PRODUCT SHEET

REV 0.0 - IT202509


4010 FLAMINGO PLUS



SLIDING


CLIMBING

INTERACTIVE GAME





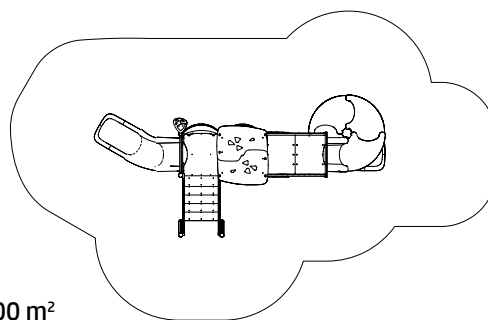


SECURITY AREA

← 900 →



34,00 m²

550

	CATALOG COLLECTION	TIKA LINE
	DIMENSIONS (L X W X H)	260 x 520 x 325 cm
	IMPACT AREA	34,00 m ²
	MAXIMUM CFH	160 cm
	SUGGESTED AGE OF USE	3+
	NUMBER OF USERS	14

PRODUCT SHEET

4010 FLAMINGO PLUS

REV 0.0 - IT202509


COMPOSITION

- n° 6 70 x70 mm octagonal section aluminium structural posts
- n° 2 recycled anti-slip HDPE decks
- n° 1 recycled HDPE sheet gable roof
- n° 2 open metal guard panels
- n° 2 roto-molded PTE guard panels
- n° 1 recycled HDPE sheet decoration
- n° 1 stairs with recycled anti-slip HDPE treads
- n° 1 roto-molded PTE modular slide H100
- n° 1 roto-molded PTE spiryal slide H160
- n° 1 metal spiral balcony with anti-slip HDPE decks
- n° 2 recycled HDPE sheet climbings

PLAY PANELS




LUDIC PLAY PANEL X1




LUDIC PLAY PANEL X1

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIAL (mm)	DESCRIPTION (mm)	MINIMUM DEPTH (mm) (b)	CRITICAL FALL HEIGHT (mm)
LAWN/SOIL			1000 (d)
BARK	20 TO 80 GRAIN SIZE	200 300	2000 3000
WOOD CHIPS	20 TO 80 GRAIN SIZE	200 300	2000 3000
SAND	20 TO 80 GRAIN SIZE	200 300	2000 3000
GRAVEL	20 TO 80 GRAIN SIZE	200 300	2000 3000
RUBBER SURFACING RESPONDENT TO HIC	THICKNESS 30 MM		DEPENDENT ON CERTIFICATION TESTS 1000
	THICKNESS 40 MM		1300
	THICKNESS 45 MM		1500
	THICKNESS 60 MM		2000
	THICKNESS 70 MM		2500
	THICKNESS 90 MM		3000