

PRODUCT SHEET  
REV 0.0 - IT202502  
**538 MOBY DICK**








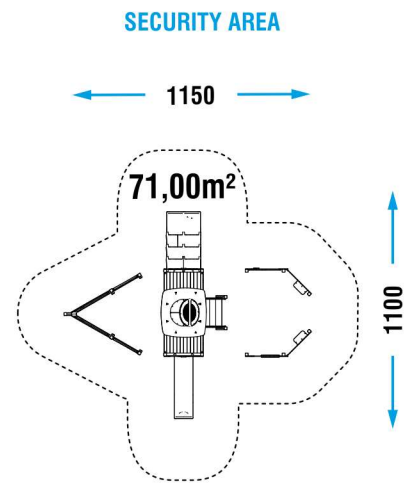
ORGANIZATION WITH QUALITY MANAGEMENT SYSTEM  
ISO 9001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate N.: GOTT2532Q1902

ORGANIZATION WITH ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001:2015 CERTIFIED by  
EuCI European Certification Institute LTD  
Certificate No: GOTT2532E1801






<b>SLIDING</b>	<b>MEETING &amp; ROLE PLAY</b>	<b>INTERACTIVE GAME</b>
		

	CATALOG COLLECTION	CLASSIC COLLECTION
	<b>DIMENSIONS (L x W x H) in cm</b>	805 x 675 x 380 cm
	<b>IMPACT AREA</b>	71,00 m <sup>2</sup>
	<b>MAXIMUM CFH</b>	140 cm
	<b>SUGGESTED AGE OF USE</b>	3+
	<b>NUMBER OF USERS</b>	25



- COMPOSITION**
- n° 19 90x90 mm square section aluminium structural poles
  - n° 3 decks with powder-coated metal frame and aluminium slats
  - n° 5 HDPE sheet guard panels
  - n° 1 stairs with recycled anti-slip HDPE steps
  - n° 1 roto-molded PTE modular slide (H140)
  - n° 1 roto-molded PTE double modular slide (H110)
  - n° 2 HDPE thrust bearings
  - n° 2 HDPE benches

**PLAY PANELS**

**MUSICAL PLAY PANEL**  
**x1**

**LUDIC PLAY PANEL**  
**x1**

**EDUCATIONAL PLAY PANEL**  
**x1**
**INSTALLATION**


Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIALE (mm) MATERIAL (mm)	DESCRIZIONE (mm) DESCRIPTION (mm)	PROFONDITÀ MINIMA (mm) (b) MINIMUM DEPTH (mm) (b)	ALTEZZA MASSIMA DI CADUTA (mm) CRITICAL FALL HEIGHT (mm)
PRATO/TERRICCIO LAWN/SOIL			1000 (d)
CORTECCIA BARK	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
TRUCIOLI DI LEGNO WOOD CHIPS	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
SABBIA SAND	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
GHIAIA GRAVEL	PEZZATURA DA 20 A 80 20 TO 80 GRAIN SIZE	200	2000
		300	3000
PAVIMENTAZIONE IN GOMMA RISPONDENTE A HIC RUBBER SURFACING RESPONDENT TO HIC	SPESSORE/THICKNESS	30mm	1000
		40mm	1300
		45mm	1500
		60mm	2000
		70mm	2500
		90mm	3000