






PRODUCT SHEET


661 CLIZIA

REV 0.0 - IT202509



SECURITY AREA

	CATALOG COLLECTION	PARTY LINE
	DIMENSIONS (L X W X H)	715 x 1165 x 600 cm
	IMPACT AREA	92,00 m ²
	MAXIMUM CFH	210 cm
	SUGGESTED AGE OF USE	5+
	NUMBER OF USERS	45

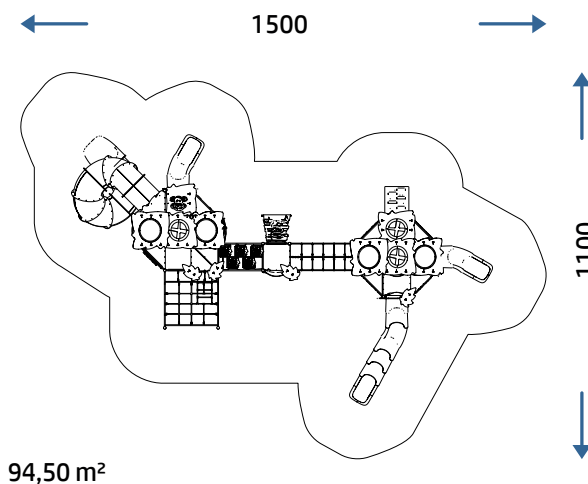


PRODUCT SHEET

661 CLIZIA

REV 0.0 - IT202509


- COMPOSITION**
- n° 32 70x70 mm octagonal section aluminum structural posts
 - n° 27 recycled anti-slip HDPE decks
 - n° 9 HDPE sheet roofs
 - n° 10 open metal guard panels
 - n° 10 closed metal guard panels
 - n° 9 HDPE sheet guard panels
 - n° 4 HDPE sheet and metal guard panels
 - n° 7 roto-molded PTE guard panels
 - n° 1 «CORDE» bridge
 - n° 1 «GOBBE» bridge
 - n° 16 HDPE sheet climbings
 - n° 1 HDPE sheet inclined climbing
 - n° 1 roto-molded PTE climbing
 - n° 1 shaped net frame
 - n° 3 HDPE sheet thrust bearing
 - n° 2 roto-molded PTE modular slides (H90)
 - n° 1 roto-molded PTE modular slide (H210)
 - n° 1 roto-molded PTE tube modular slide (H330)
 - HDPE sheet decorations

PLAY PANELS

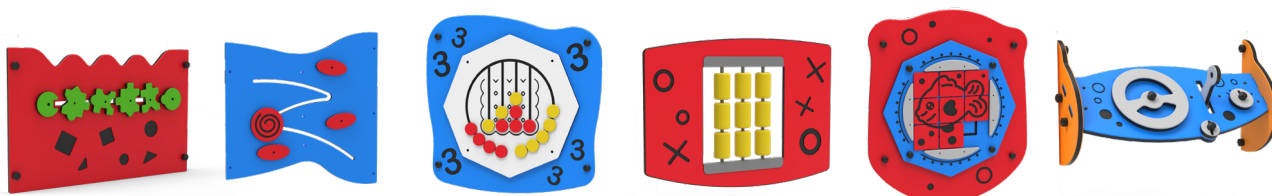


PANNELLO LUDICO X1 PANNELLO LUDICO X1 PANNELLO LUDICO X1 PANNELLO LUDICO X1 PANNELLO LUDICO X1 PANNELLO LUDICO X1

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

MATERIAL (mm)	DESCRIPTION (mm)	MINIMUM DEPTH (mm) (b)	CRITICAL FALL HEIGHT (mm)
LAWN/SOIL			1000 (d)
BARK	20 TO 80 GRAIN SIZE	200 300	2000 3000
WOOD CHIPS	20 TO 80 GRAIN SIZE	200 300	2000 3000
SAND	20 TO 80 GRAIN SIZE	200 300	2000 3000
GRAVEL	20 TO 80 GRAIN SIZE	200 300	2000 3000
RUBBER SURFACING RESPONDENT TO HIC	THICKNESS 30 MM		DEPENDENT ON CERTIFICATION TESTS 1000
	THICKNESS 40 MM		1300
	THICKNESS 45 MM		1500
	THICKNESS 60 MM		2000
	THICKNESS 70 MM		2500
	THICKNESS 90 MM		3000