



PRODUCT SHEET



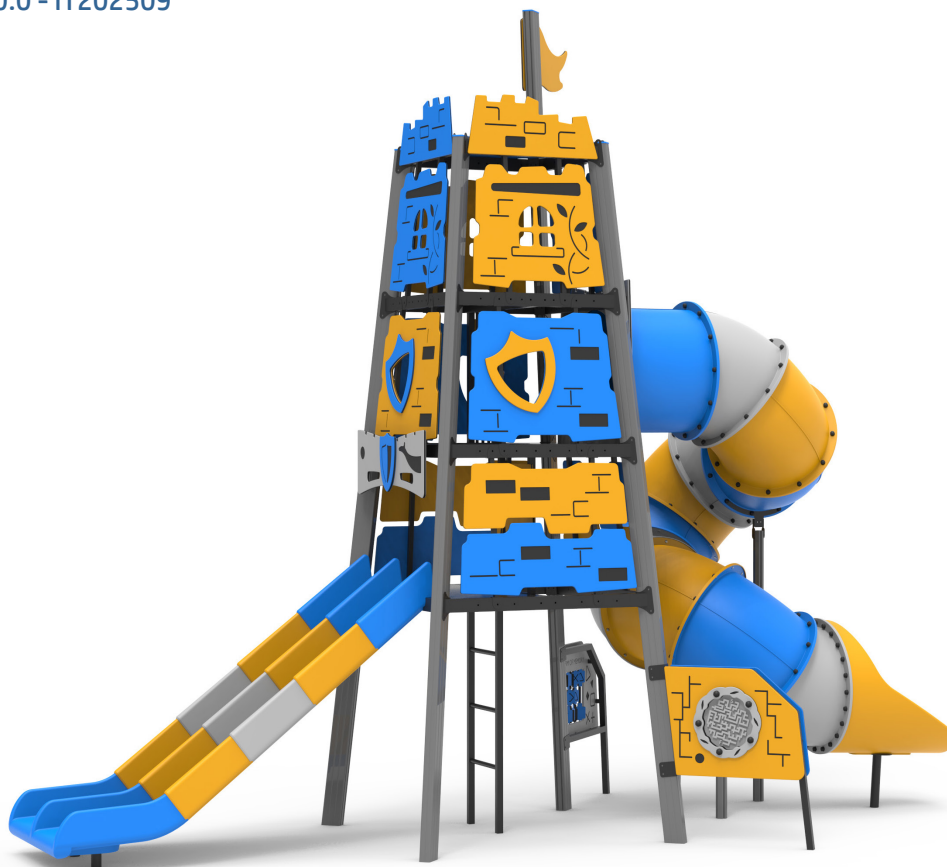


REV 0.0 - IT202509

0995 MITOS

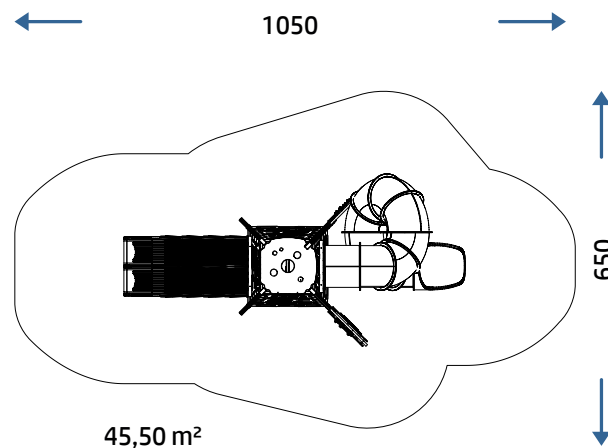

SECURITY AREA



| | CATALOG COLLECTION | TITAN COLLECTION |
|------------------------------------------------------------------------------------|-------------------------------|----------------------|
|  | DIMENSIONS (L X W X H) | 630x310x515 cm |
|  | IMPACT AREA | 30,50 m ² |
|  | MAXIMUM CFH | 150 cm |
|  | SUGGESTED AGE OF USE | 5+ |
|  | NUMBER OF USERS | 20 |

PRODUCT SHEET

0995 MITOS

REV 0.0 - IT202509


COMPOSITION

- n° 4 aluminum posts rectangular section 70x130mm
- n° 2 anti-slip aluminum platforms with frame in powder coated steel
- n° 1 H150 ladder in powder-coated steel
- n° 1 hdpe climbing 19mm thickness
- n° 10 barriers in 15mm thick HDPE sheet
- n° 1 rotational PTE tube slide (H250)
- n° 1 double track modular slide (H150)
- n° 2 decorations in 15mm thick HDPE sheet
- n° 1 flag in HDPE sheet thickness 15mm


PANNELLI GIOCO



LUDIC PLAY PANEL X1




LUDIC PLAY PANEL X1



EDUCATIONAL PLAY PANEL X1

INSTALLATION



Where there is an aluminum pole, the plinth must be created directly on it.



If there is already an adequate fund in CLS the game can be supplied with special brackets for fixing to the ground (option applicable only with confirmation of feasibility).

Make a proper security surface according to CFH. Periodic maintenance is mandatory, following manual supplied to customer.

| MATERIAL (mm) | DESCRIPTION (mm) | PROFONDITÀ MINIMA (mm) (b) | ALTEZZA MASSIMA DI CADUTA (mm) |
|---------------------------------------|---------------------|----------------------------|------------------------------------------|
| LAWN/SOIL | | | 1000 (d) |
| BARK | 20 TO 80 GRAIN SIZE | 200 300 | 2000 3000 |
| WOOD CHIPS | 20 TO 80 GRAIN SIZE | 200 300 | 2000 3000 |
| SAND | 20 TO 80 GRAIN SIZE | 200 300 | 2000 3000 |
| GRAVEL | 20 TO 80 GRAIN SIZE | 200 300 | 2000 3000 |
| RUBBER SURFACING RESPONDENT TO HIC | THICKNESS 30 MM | | DEPENDING ON CERTIFICATION TESTS 1000 |
| | THICKNESS 40 MM | | 1300 |
| | THICKNESS 45 MM | | 1500 |
| | THICKNESS 60 MM | | 2000 |
| | THICKNESS 70 MM | | 2500 |
| | THICKNESS 90 MM | | 3000 |